

Contents lists available at Sjournals

Scientific Journal of  
**Biological Sciences**

Journal homepage: [www.Sjournals.com](http://www.Sjournals.com)



### Review article

## Recent advances in biomass and biogas development and perspectives: bringing together geographical and sociological imaginations

**A.M. Omer**

*UON, Forest Road West, Nottingham NG7 4EU, UK.*

\*Corresponding author ; *UON, Forest Road West, Nottingham NG7 4EU, UK.*

#### ARTICLE INFO

##### *Article history:*

Received 01 September 2013

Accepted 14 September 2013

Available online 28 September 2013

##### *Keywords:*

Ginger

Sperm count

Spermatogenesis

Rats

Androgenic activity

#### ABSTRACT

Biogas from biomass appears to have potential as an alternative energy source, and biomass resources are available worldwide. This is an overview of some salient points and perspectives of biogas technology. The current literature is reviewed regarding the ecological, social, cultural and economic impacts of biogas technology. This article gives an overview of present and future use of biomass as an industrial feedstock for the production of fuels, chemicals and other materials. To be truly competitive in an open market situation, higher value products are required. Results suggest that biogas technology must be encouraged, promoted, invested in, implemented and demonstrated, especially in remote rural areas.

© 2013 Sjournals. All rights reserved.

### 1. Introduction

Energy is an essential factor of development since it stimulates and supports economic growth and development. Fossil fuels, especially oil and natural gas, are finite in extent, and should be regarded as depleting assets, and efforts are oriented to search for new sources of energy. The clamour all over the world for the need to conserve energy and the environment has intensified as traditional energy resources continue to dwindle, whilst

the environment becomes increasingly degraded. The basic form of biomass comes mainly from firewood, charcoal and crop residues. Out of the total fuel wood and charcoal supplies, 92% is consumed in the household sector with most of firewood consumption in rural areas.

The term biomass is generally applied to plant material grown for non-food use, including that grown as a source of fuel. However, the economics of production are such that purpose-grown crops are not competitive with fossil fuel alternatives under many circumstances in industrial countries, unless subsidies and/or tax concessions are applied. For this reason, much of the plant material used as a source of energy at present is in the form of crop and forest residues, animal manure, and the organic fraction of municipal solid waste and agro-industrial processing by-products, such as bagasse, oil-palm residues, sawdust and wood offcuts. The economics of use of such materials are improved since they are collected in one place and often have associated disposal costs.

Combustion remains the method of choice for heat and power generation (using steam turbines) for drying raw materials, while biogas production through anaerobic digestion or in landfills is widely used for valorisation of wet residues and liquid effluents for heat and power generation (using gas engines or gas turbines). In addition, some liquid fuel is produced from purpose-grown crops (ethanol from sugarcane, sugar beet, maize, sorghum and wheat or vegetable oil esters from rapeseed, sunflower, oil palm). The use of wastes and residues has established these basic conversion technologies, although research, development and demonstration continue to try and improve the efficiency of thermal processing through gasification and pyrolysis, linked to combined-cycle generation. At the same time, considerable effort is being made to increase the range of plant-derived non-food materials. To achieve this, several approaches are being taken. The first is to provide lower cost raw materials for production of bulk chemicals and ingredients that can be used in detergents, plastics, inks, paints and other surface coatings. To a large extent, these are based on vegetable oils or starch hydrolysates used in fermentation to produce lactic acid (for polylactides) or polyhydroxybutyrate, as well as modified starches, cellulose and hemicelluloses. The advantages are biodegradability, compatibility with biological systems (hence, less allergic reaction in use) and sparing of fossil carbon dioxide emissions (linked to climate change).

Associating an economic value to these environmental benefits, linked to consumer preferences has contributed to increased production in this area. The second expanding activity is the use of plant fibres, not only for non-tree paper, but also as a substitute for petroleum-based plastic packing and components, such as car parts. These may be derived from non-woven fibres, or be based on bio-composite materials (lingocellulose chips in a suitable plastic matrix). At the other end of the scale, new methods of gluing, strengthening, preserving and shaping wood have increased the building of large structures with predicted long lifetimes. These include a wide range of natural products, such as flavours, fragrances, hydrocolloids and biological control agents. In spite of decades of research and development, engineering (recombinant DNA technology) is being widely investigated to achieve this, as well as to introduce new routes to unusual fatty acids and other organic compounds. In addition, such techniques are being used to construct plants that produce novel proteins and metabolites that may be used as vaccines or for other therapeutic uses. Processing of the crops for all these non-food uses will again generate residues and by-products that can serve as a source of energy, for internal use in processing, or export to other users, suggesting the future possibility of large multi-product biomass-based industrial complexes.

### **1.1. Technical description**

Bacteria form biogas during anaerobic fermentation of organic matters. Degradation is a very complex process and requires certain environmental conditions as well as different bacteria populations. The complete anaerobic fermentation process is briefly described below as shown in Table 1, and Figure 1. Biogas is a relatively high-value fuel that is formed during anaerobic degradation of organic matter. The process has been known, and put to work in a number of different applications during the past 30 years, for rural needs, such as in food security, water supply, health care, education and communications.<sup>1</sup>

During the last decades, thousands of biogas units were built all over the world, producing methane CH<sub>4</sub> for cooking, water pumping and electricity generation. It is important conscientious planning must urged.<sup>2</sup> The goals should be achieved through:

Review and exchange of information on computer models and manuals useful for economic evaluation of biogas from biomass energy;

Exchange of information on methodologies for economic analysis and results from case studies;

Investigation of the constraints on the implementation of the commercial supply of biogas energy;

Investigation of the relations between supplies and demand for the feedstock from different industries;

Documentation of the methods and principles for evaluation of indirect consequences such as effects on growth, silvicultural treatment, and employment.

Biogas technology cannot only provide fuel, but is also important for comprehensive utilisation of biomass forestry, animal husbandry, fishery, agricultural economy, protecting the environment, realising agricultural recycling, as well as improving the sanitary conditions, in rural areas. The introduction of biogas technology on wide scale has implications for macro-planning, such as the allocation of government investment and effects on the balance of payments. Factors that determine the rate of acceptance of biogas plants, such as credit facilities and technical backup services, are likely to have to be planned as part of general macro-policy, as do the allocation of research and development funds.

**Table 1**

Anaerobic degradation of organic matter.

Level	Substance	Molecule	Bacteria
Initial	Manure, vegetable, wastes	Cellulose, proteins	Cellulolytic, proteolytic
Intermediate	Acids, gases, oxidized, inorganic salts	CH <sub>3</sub> COOH, CHOOH, SO <sub>4</sub> , CO <sub>2</sub> , H <sub>2</sub> , NO <sub>3</sub>	Acidogenic, hydrogenic, sulfate reducing
Final	Biogas, reduced inorganic compounds	CH <sub>4</sub> , CO <sub>2</sub> , H <sub>2</sub> S, NH <sub>3</sub> , NH <sub>4</sub>	Methane formers

Biogas is a generic term for gases generated from the decomposition of organic material. As the material breaks down, methane (CH<sub>4</sub>) is produced as shown in Figure 1. Sources that generate biogas are numerous and varied. These include landfill sites, wastewater treatment plants and anaerobic digesters. Landfills and wastewater treatment plants emit biogas from decaying waste. To date, the waste industry has focused on controlling these emissions into our environment and in some cases, tapping this potential source of fuel to power gas turbines, thus generating electricity. The primary components of landfill gas are methane (CH<sub>4</sub>), carbon dioxide (CO<sub>2</sub>), and nitrogen (N<sub>2</sub>). The average concentration of methane is ~45%, CO<sub>2</sub> is ~36% and nitrogen is ~18%. Other components in the gas are oxygen (O<sub>2</sub>), water vapour and trace amounts of a wide range of non-methane organic compounds (NMOCs).

For hot water and heating, renewable contributions come from biomass power and heat, geothermal direct heat, ground source heat pumps, and rooftop solar hot water and space heating systems. Solar assisted cooling makes a very small but growing contribution. When it comes to the installation of large amounts of solar photovoltaic (PV) panels, the cities have several important factors in common. These factors include:

A strong local political commitment to the environment and sustainability;

The presence of municipal departments or offices dedicated to the environment, sustainability or renewable energy;

Information provision about the possibilities of renewables;

Obligations that some or all buildings include renewable energy.

Biogas utilisation

The importance and role of biogas in energy production is growing. Nowadays, a lot of countries in Europe are promoting the utilisation of renewable energies by guaranteed refund policies or emission trading systems. A general schematic of an agricultural biogas plant, with the anaerobic digester at the 'heart' of it is shown in Figure 2. Pretreatment steps (e.g., chopping, grinding, mixing or hygienisation) depend on the origin of the raw materials.

In the past two decades, the world has become increasingly aware of the depletion of fossil fuel reserves and the indications of climatic changes based on carbon dioxide emissions. Therefore, extending the use of renewable resources, efficient energy production and the reduction of energy consumption are the main goals to reach a sustainable energy supply. Renewable energy sources include water and wind power, solar and geothermal energy, as well as energy from biomass. The technical achievability and the actual usage of these energy sources are different around Europe, but biomass is seen to have a great potential in many of them. An efficient method for the conversion of biomass to energy is the production of biogas by microbial degradation of organic matter under the absence of oxygen (anaerobic digestion). It is now possible to produce biogas in rural areas, upgrade it to bio-methane, feed it into the gas grid, use it in a heat demand-controlled CHP and to receive revenues.

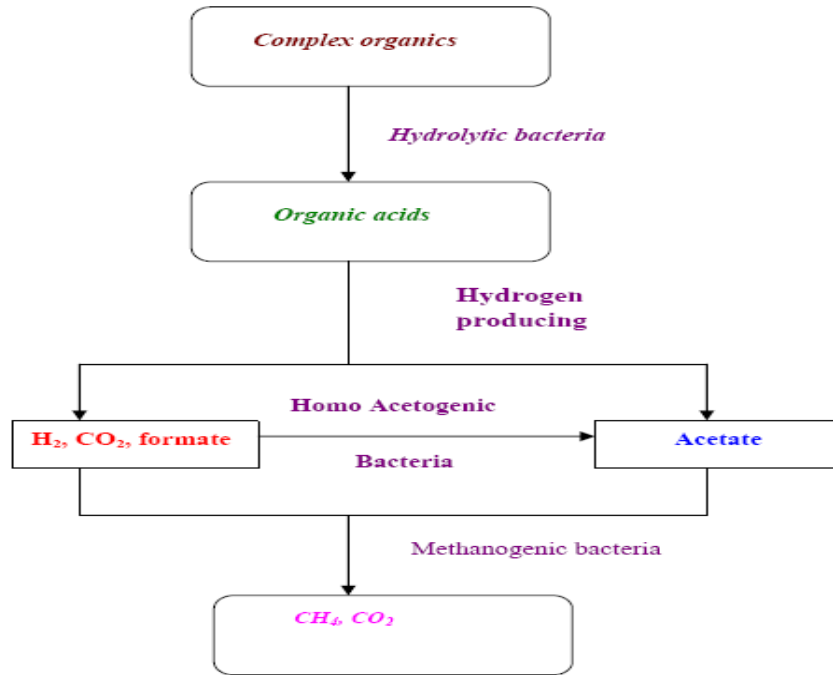


Fig. 1. Biogas production process.

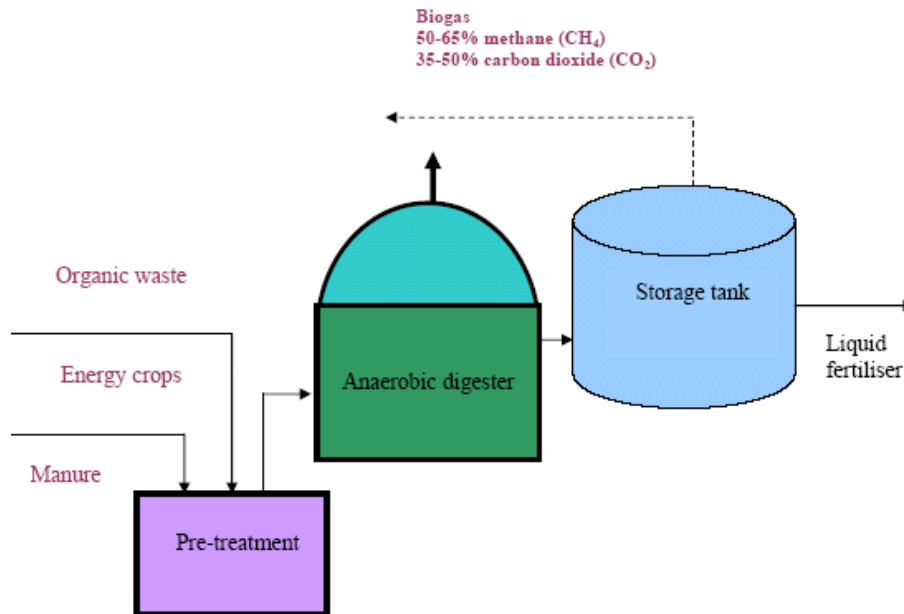


Fig. 2. General schematic of an agricultural biogas plant.

Biogas is a mixture containing predominantly methane (50-65% by volume) and carbon dioxide, and in a natural setting it is formed in swamps and anaerobic sediments, etc. Due to its high methane concentration, biogas is a valuable fuel. Wet (40-95%) organic materials with low lignin and cellulose content are generally suitable for anaerobic digestion (Figure 3). A key concern is that the treatment of sludge tends to concentrate heavy metals, poorly biodegradable trace organic compounds and potentially pathogenic organisms (viruses, bacteria and the like) present in wastewaters. These materials can pose a serious threat to the environment. When deposited in soils, heavy metals are passed through the food chain, first entering crops, and then animals that feed on the crops

and eventually human beings, to whom they appear to be highly toxic. In addition, they also leach from soils, getting into groundwater and further spreading contamination in an uncontrolled manner. European and American markets aim to transform various organic wastes (animal farm wastes, industrial and municipal wastes) into two main by-products: a solution of humic substances (a liquid oxidate) and a solid residue.

**1.2. Ecological advantages of biogas technology**

An easier situation can be found when looking at the ecological effects of different biogas utilisation pathways. The key assumptions for the comparison of different biogas utilisation processes are:

Biogas utilisation in heat demand controlled gas engine supplied out of the natural gas grid with 500 kWe – electrical efficiency of 37.5%, thermal efficiency of 42.5%, and a methane loss of 0.01;

Biogas utilisation in a local gas engine, installed at the biogas plant with 500 kWe – electrical efficiency of 37.5%, thermal efficiency of 42.5%, and a methane loss of 0.5;

Biogas production based on maize silage using a biogas plant with covered storage tank – methane losses were of 1% of the biogas produced;

Biogas upgrading with a power consumption of 0.3 kWh/m<sup>3</sup> biogas – methane losses of 0.5.

Figure 4 presents the results of the greenhouse gas (GHG) savings from the different biogas utilisation options, in comparison with the fossil fuel-based standard energy production processes.


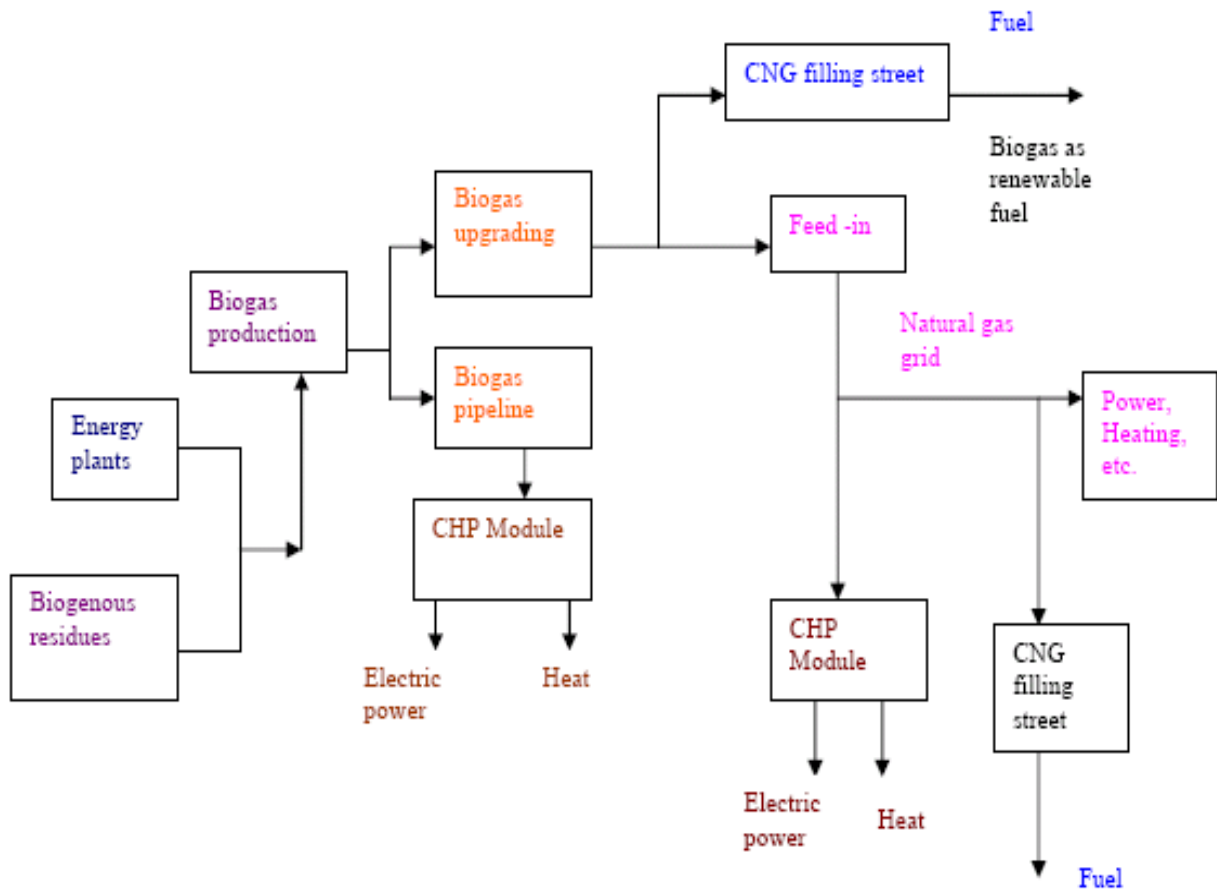


Fig. 3. Overview of biogas utilisation pathways.

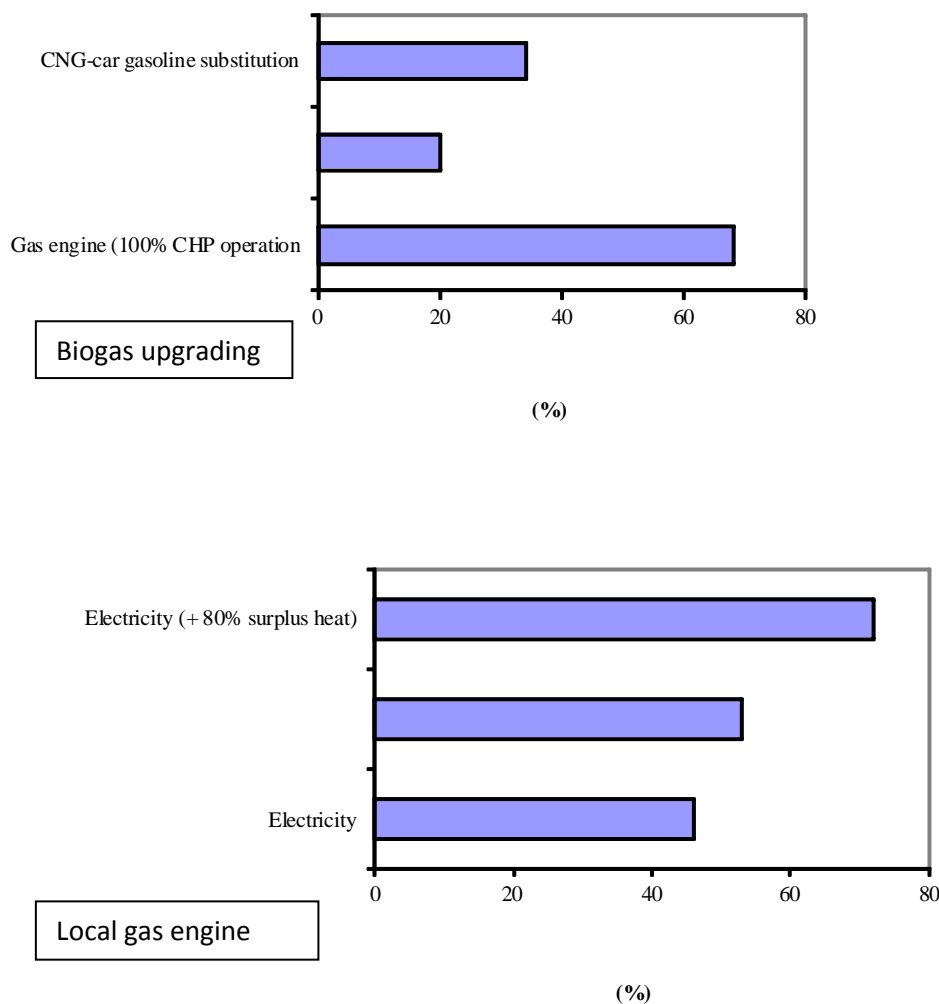

**Fig. 4.** Greenhouse gas emissions for different biogas utilisation pathways in comparison with fossil energy production

Biogas can be converted to energy in several ways. The predominant utilisation is combined heat and power (CHP) generation in a gas engine installed at the place of biogas production. There are mainly two reasons for this. First, biogas production is an almost continuous process; it is rather difficult or, in the short term, even impossible, to control the operation of anaerobic digesters according to any given demand profile. Secondly, promotion of renewable energies is focused on electricity production. Because of that, biogas plant operators receive the predominant fraction of revenues from the guaranteed feed-in tariffs for electricity. Summarising the results of the eco-balances, it becomes obvious that – not only by using fossil fuels but also by using renewable fuels like biogas – combined heat and power cogeneration is the optimal way for fighting climate change. From a technical point of view, it can be concluded that biogas production, i.e., the conversion of renewable resources and biowaste to energy can be seen as state-of-the-art technology.

In an economic analysis, many factors have to be considered as outlined in Table 2. Due to the lack of knowledge and awareness, villagers cannot be expected to understand the benefits of solar stills, nutrient conservation, or health improvement. A poor rural peasant is very hesitant to enter a new venture. The negative attitude towards the use of solar still water varies from place to place, but when it occurs, it is a major obstacle to


the implementation of solar still technology. In designing the solar still, the following points have to be considered: the unit has to cost as little as possible and materials should be readily available in rural areas. Technology should be simple, within the reach of a common villager. The unit should be usable in situations of emergency, e.g., during floods and after cyclones etc. Energy efficiency brings health, productivity, safety, comfort and savings to the homeowner, as well as local and global environmental benefits. The use of renewable energy resources could play an important role in this context, especially with regard to responsible and sustainable development. It represents an excellent opportunity to offer a higher standard of living to the local people, and will save local and regional resources. The implementation of renewable energy technologies offers a chance for economic improvement by creating a market for producing companies, maintenance and repair services. The production of bio-fuels, such as ethanol from sugarcane, takes advantages of year-round cultivation potential in tropical countries. Benefits extend from local to regional to national to global. Local rural economies benefit through new economic opportunities and employment in the agricultural sector. Urban regions benefit through cleaner air and health improvements. The nation benefits through substituting domestic resources for costly imported gasoline. The world benefits from reduced CO<sub>2</sub> emissions.

**Table 2**  
Factors to be considered in economic analysis.


---

<b>Economic factors</b>
Interest on loan
Current/future cost of alternative fuels
Current/future cost of construction materials
Saving of foreign currency
Current/future labour cost
Inflation rate
<b>Social factors</b>
Employment created
Less time consumed for fetching clean water
Improved facilities in villages, thus less migration to cities
Less expense for buying alternative fuels
More time for additional income earning activities
<b>Technical factors</b>
Construction, maintenance and repairs of biogas plants
Availability of materials and land required
Suitability of local materials
<b>Ecological/health factors</b>
Improved health
Environment pollution abatement
Improvement in yields of agriculture products

---

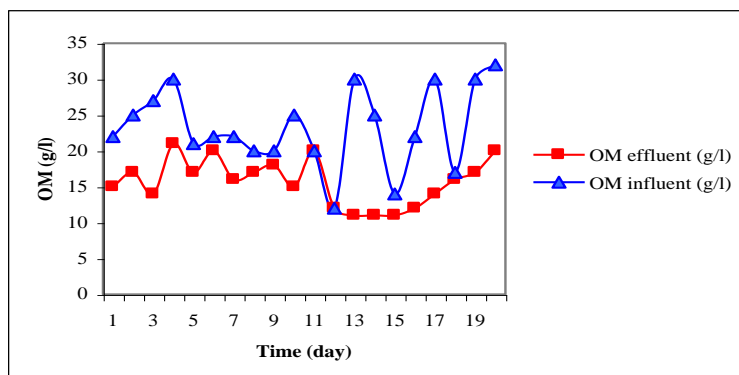

**Fig. 5.** Organic matter before and after treatment in the digester

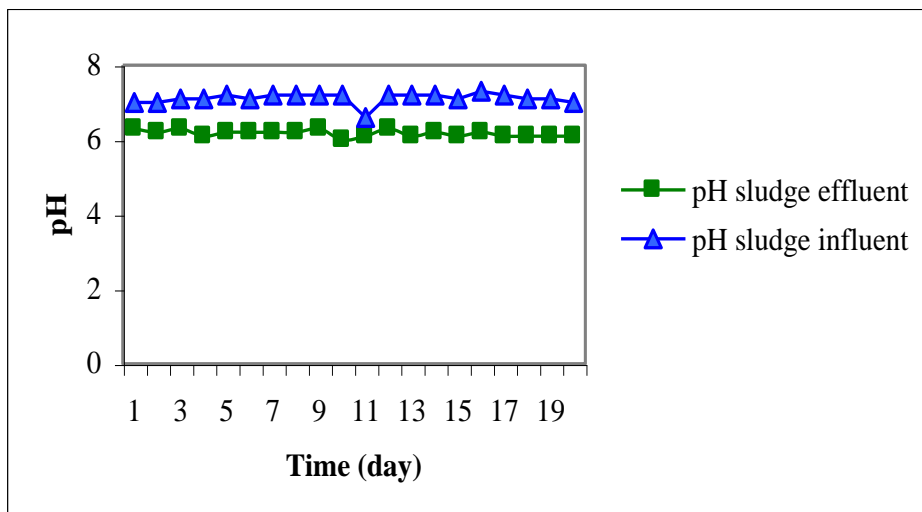

**Fig. 6.** Sludge pH before and after treatment in the digester

Gasification is based on the formation of a fuel gas (mostly CO and H<sub>2</sub>) by partially oxidising raw solid fuel at high temperatures in the presence of steam or air.<sup>6,7</sup> The technology can use wood chips, groundnut shells, sugarcane bagasse, and other similar fuels to generate capacities from 3 kW to 100 kW. Three types of gasifier designs have been developed to make use of the diversity of fuel inputs and to meet the requirements of the product gas output (degree of cleanliness, composition, heating value, etc.). The requirements of gas for various purposes, and a comparison between biogas, and various commercial fuels in terms of calorific value, and thermal efficiency are presented in Table 3.

Growth, modernisation and urbanisation in many states of Sudan have created both energy supply shortages and a growing source of free fuel: biogas. The use of biogas has been proven and is ready to be deployed in Sudan. The technology is available, it is economically feasible and it is reliable. An additional benefit of using these gases as a fuel source is minimisation of the environmental impacts that result from gas venting or flaring. The burning of such gases releases air-borne pollutants, which can also enter groundwater sources and pollute farmlands. According to Table 4, the optimum conditions are ambient temperatures during the hot seasons of Sudan's tropical climate. The potential gas volumes produced from wastes vary depending on many factors, and can be expressed based in head count (Figures 5-6 present organic treatments in digesters).

### 1.3. Biomass and sustainability

There is an unmistakable link between energy and sustainable human development. Energy is not an end in itself, but an essential tool to facilitate social and economic activities. Thus, the lack of available energy services correlates closely with many challenges of sustainable development, such as poverty alleviation, the advancement of women, protection of the environment and job creation. Emphasis on institution-building and enhanced policy dialogue is necessary to create the social, economic, and politically enabling conditions for a transition to a more sustainable future. On the other hand, biomass energy technologies are a promising option, with a potentially large impact for Sudan as with other developing countries, where the current levels of energy services are low. Biomass accounts for about one third of all energy in developing countries as a whole, and nearly 96% in some of the least developed countries.<sup>10-12</sup>

### 1.4. Environmental issues of biomass

Climate change is a growing concern around the world, and stakeholders are aggressively seeking energy sources and technologies that can mitigate the impact of global warming. This global concern is manifest in the 1997 Kyoto Protocol, which imposes an imperative on developed nations to identify feasible options by the following Conference of the Parties to the Convention (COP), meeting later in 2001. Possible actions range from basic increases in energy efficiency and conservation, to sophisticated methods of carbon sequestration to capture the



most common greenhouse gases (GHGs) emission (CO<sub>2</sub>). On the other hand, renewable energies have always been identified as a prime source of clean energies that emit little or no net GHGs into the atmosphere. Forest ecosystems cause effects on the balance of carbon mainly by the assimilation of CO<sub>2</sub> by the aboveground biomass of the forest vegetation.

**Table 3**  
Comparison of various fuels.

Fuel	Calorific value (kcal)	Burning mode	Thermal efficiency (%)
Electricity, kWh	880	Hot plate	70
Coal gas, kg	4004	Standard burner	60
Biogas, m <sup>3</sup>	5373	" "	60
Kerosene, l	9122	Pressure stove	50
Charcoal, kg	6930	Open stove	28
Soft coke, kg	6292	" "	28
Firewood, kg	3821	" "	17
Cow dung, kg	2092	" "	11

**Table 4**  
Optimum conditions for biogas production.

Parameter	Optimum value
Temperature (°C)	30-35
pH	6.8-7.5
Carbon/Nitrogen ratio	20-30
Solid content (%)	7-9
Retention time (days)	20-40

The annual emissions of greenhouse gases from fossil fuel combustion and land use change are approximately 33 x 10<sup>5</sup> and 38 x 10<sup>5</sup> tonnes, respectively. Vegetation and, in particular, forests can be managed to sequester carbon. Management options have been identified to conserve and sequester up to 90 Pg C in the forest sector in the next century, through global afforestation.<sup>13,14</sup> This option may become a necessity (as recommended at the Framework Convention on Climate Change meeting held in Kyoto), but a preventive approach could be taken, reducing total GHGs emissions by substituting biomass for fossil fuels in electricity production.

Simply sequestering carbon in new forests is problematic because trees cease sequestering once they reach maturity, and as available land is used up the cost of further afforestation will grow. Indeed, the cost of reducing the build-up of GHGs in the atmosphere is already lower for fossil fuel substitution than for sequestration, since fast-growing energy crops are more efficient at carbon removal, and because revenue is generated by the scale of electricity. Some biomass fuel cycles can also provide the additional benefits of enhanced carbon storage. The relative merits of sequestration versus fossil fuel substitution are still debated. The flow of carbon during the lifecycle of biomass should determine whether it is better left standing, used as fuel or used as long-lived timber products. Where there are forests in good condition, there is general agreement that they should not be cut for fuel and replanted. This principle also concurs with the guidelines for nature protection, i.e., energy crops should never displace land uses of high ecological value. Where afforestation is undertaken, however, fossil fuel substitution, both by using wood fuel and using timber as a renewable raw material, should be more sustainable and less costly approach than sequestration and could also be used to displace the harvest of more ecologically

valuable forests. For efficient use of bioenergy resources, it is essential to take into account the intrinsic energy potential. Despite the availability of basic statistics, many differences have been observed between previous assessments of bioenergy potential.<sup>15,16</sup> These were probably due to different assumptions or incomplete estimations of the availability, accessibility and use of by-products. The biomass sources have been used through:

- Anaerobic digestion of municipal wastes and sewage;
- Direct combustion of forestry and wood processing residues;
- Direct combustion in the case of main dry crop residues;
- Anaerobic digestion of moist residues of agricultural crops and animal wastes.

Wood is a very important raw material used by a number of industries. Its excessive utilisation as a fuel results in soil erosion, degradation of the land, reduced agricultural productivity and potentially serious ecological damage. Hence, minimisation of fuelwood demand at a national level and an increase in the efficiency of fuelwood use seem to be essential. The utilisation of more efficient stoves and the improvement of insulation using locally available materials in buildings are also effective measures to increase efficiency. Biogas or commercial fuels may be thought of as possible substitutes for fuelwood. In rural areas of Sudan, liquefied petroleum gases (LPGs) are a strong candidate to replace firewood. Indeed, increased, LPG utilisation over the last decade has been one of the main reasons that have led to the deceleration of the diffusion of biogas technology into rural areas.

### **1.5. Energy from agricultural biomass**

The main advantages related to energy, agriculture and environment problems are foreseeable both regionally and globally and can be summarised as follows:

Reduction of dependence on import of energy and related products, and reduction of environmental impact of energy production (greenhouse effect, air pollution, waste degradation);

Substitution of food crops and reduction of food surpluses and of related economic burdens;

Utilisation of marginal lands and of set aside lands and reduction of related socio-economic and environmental problems (soil erosion, urbanisation, landscape deterioration, etc.);

Development of new know-how and production of technological innovation.

A study<sup>16</sup> carried out on the basis of botanical, genetical, physiological, biochemical, agronomical and technological knowledge reported some 150 potentially exploitable species divided as reported in Table 5. Turning to chemical engineering and the experience of the chemical process industry represents a waking-up, but does not lead to an immediate solution to the problems. The traditional techniques are not very kind to biological products, which need physico-chemical properties. There is the question of selectivity. The fermentation broths resulting from microbial growth contain a bewildering mixture of many compounds closely related to the product of interest. By the standards of the process streams in chemical industry, the fermenter is highly impure and extremely dilute aqueous systems. The disadvantages of the fermentation media are the following: they are mechanically fragile, temperature sensitive, rapidly deteriorating, harmful if escaping into the environment, corrosive (acids, chlorides, etc.), troublesome (solids, theological etc.), and expensive. Thus, pilot plants for scale-up work must be flexible. In general, they should contain suitably interconnected equipment for: fermentation, primary separation, cell disruption, fractionation and clarifications, purification by means of high-resolution techniques and concentration and dry. The effects of the chlorofluorocarbon (CFCs) molecule can last for over a century.

### **1.6. Biogas digester designs**

In practice, there have been developed two main types of biogas plants: the fixed-dome digester, which is commonly called the Chinese digester, and the type with a floating gas holder, known as Indian digester. The potential gas volumes produced from wastes vary depending on many factors, and can be expressed based on head count, as shown in Table 6, or on a fixed weight, as shown in Table 7. A list of potential gas production materials is presented in Table 8. The requirements of gas for various purposes, and a comparison between biogas and various commercial fuels in terms of calorific value and thermal efficiency are presented successively in Table 9. The amount of biogas actually produced from a specific digester depends on the following factors: (1) amount of material fed, (2) type of material (3), the carbon/nitrogen ratio and (4) digestion time and temperature.

Combined heat and power (CHP) installations are quite common in greenhouses, which grow high-energy, input crops (e.g., salad vegetables, pot plants, etc.). Scientific assumptions for a short-term energy strategy suggest that the most economically efficient way to replace thermal plants is to modernise existing power plants to

increase their energy efficiency and to improve their environmental performance. However, the utilisation of wind power and the conversion of gas-fired CHP plants to biomass would significantly reduce the dependence on imported fossil fuels. Although a lack of generating capacity is forecast in the long run, the utilisation of the existing renewable energy potential and the huge possibilities for increasing energy efficiency are sufficient to meet future energy demands in Sudan for a short term.

**Table 5**

Plant species potentially exploitable for production of agricultural biomass for energy or industrial utilisations.

<b>Groups of plants</b>	<b>Number of species</b>
Plants cultivated for food purposes that can be reconverted to new uses	9
Plants cultivated in the past, but not in culture any more	46
Plants cultivated in other world areas	46
Wild species, both indigenous and exotic	47
<b>Total</b>	<b>148</b>
<b>Plant product</b>	<b>Number of species</b>
Biomass	8
Sugars and polysaccharides	38
Cellulose	17
Hydrocarbons	3
Polymeric hydrocarbons	5
Gums and resins	12
Tannins and phenolic compounds	3
Waxes	7
Vegetable oils	38
<b>Total</b>	<b>131</b>

**Table 6**

Average daily gas production based on head count.

<b>Source of waste</b>	<b>Waste production (kg d-1)</b>	<b>Gas production (m<sup>3</sup> d-1)</b>
1 cow	10	0.25-0.40
10 chicken	-	0.02-0.04
1 latrine user	1	0.02-0.03
1 sheep/goat	-	0.02-0.04

**Table 7**

Average gas production based on waste amount.

<b>Source of waste</b>	<b>Gas production, m<sup>3</sup>/103 kg animal</b>	<b>Gas production, m<sup>3</sup>/103 kg waste</b>
Dairy cattle	2.53	-
Beef cattle	2.47	-
Poultry	6.92	65.5-115
Pretreated crop waste	-	30-40
Water hyacinth	-	40-50

A total shift towards a sustainable energy system is a complex and long process and can be achieved within a period of about 20 years. The implementation will require initial investment, long-term national strategies and action plans. The changes will have a number of benefits, including a more stable energy supply than at present and major improvement in the environmental performance of the energy sector, as well as certain social benefits. A vision using a methodology and calculations based on computer modelling utilised:

**Table 8**

Ultimate gas yields for some different materials.

Materials	Yield, m <sup>3</sup> /kg day solids
Manure:	
Cow	0.34
Poultry	0.48
Human	0.40
Vegetable matter:	
Straw	0.17
Grass	0.43
Leaves	0.30
Water hyacinth	0.40

Data from existing governmental programmes;

Potential renewable energy sources and energy efficiency improvements;

Assumptions for future economy growth;

Information from studies and surveys on the recent situation in the energy sector.

In addition to realising the economic potential identified by the National Energy Savings Programme, a long-term effort leading to a 3% reduction in specific electricity demand per year after 2020 is proposed. This will require further improvements in building codes, and continued information on energy efficiency.

One of the most important issues that influence the individual and social life of humans is sexual intentions. Sexual behavior is one of the major health issues in life (Khaki *et al.*, 2009). Infertility is one of the major health problems in life and approximately 30% of infertility is due to male factor. Several conditions can interfere with spermatogenesis and reduce sperm production and quality (Isidori *et al.*, 2006). A number of nutritional therapies have shown to increase sperm counts and motility (Sigman *et al.*, 2006), folic acid and zinc (Wong *et al.*, 2002).

**Table 9**

Biogas requirements for various purposes.

Purpose	Specifications	Gas required, m <sup>3</sup> /day
Cooking	per person	0.425
	stove, 10 cm diameter	0.47
Lighting	200-candle power	0.1
	40-watt bulb	0.13
	2-mantle	0.14
Gasoline engine	Per HP	0.43
Diesel engine	Per HP	0.45
Refrigerator	Per m <sup>3</sup>	1.2
Incubator	Per m <sup>3</sup>	0.6
Table fan (indirectly)	30 cm diameter	0.17
Space heater	30 cm diameter	0.16

*Zingiber officinale* commonly called ginger belongs to the family *Zingiberaceae*. The ginger plant has a long history of cultivation, and it is known to originate from China and then spread to India, Southeast Asia, West Africa, and the Caribbean (Lister, 2003). The local name in Yoruba is *Atale / Aje or Atale Fun-Fun* (Ogungbemi, 2006) in Hindi is *Aadrak* while in Gujarati is *Aadu* and *Cjitta* in Hausa (Memudu *et al.*, 2012). It is general known to be used as a culinary in making ginger tea, as well as a spice in food. The anti-oxidative and androgenic activities of *Z. officinale* have been reported in animal models (Kamtchouing *et al.*, 2002; Sekiwa *et al.*, 2000). Medicinal properties of ginger are numerous due to its active component (Chaiyakunaprak *et al.*, 2006). It is made up of phytochemicals such as zingerone, gingerdiol, zingibrene, shogols and *gingerol* (Sekiwa *et al.*, 2000). Its active component is *gingerol* which acts as an anti-oxidant and is responsible for its taste (Witchl, 2004). However, ginger extract has recently been shown to have a variety of biological activities, including anti-inflammation, antimicrobial

properties anti-platelet, antioxidant, anti-tumour, anti-rhinoviral, anti-hepatotoxic and anti-arthritis (Amin and Hamza, 2006). Although the beneficial effects of ginger has been exploited, however little research has been conducted on its activity on male reproductive functions. The study was designed to evaluate the effect of aqueous ginger extract on sperm count in wistar rats.

#### **4. Discussion**

Financial hedges (such as futures and options) are contractual vehicles that convey rights and obligations to buy or sell a commodity at a specified price. Possible purchasing strategies using hedges are summarised in Table 10. These financial derivations are a method of reducing price risk with a relatively modest transaction price. Over the past 10 years the use of financial hedges has grown dramatically. Figure 7 illustrates various hypothetical reduction strategies and the resulting average fuel price. The basic concept is to utilise existing financial tools to guard against conditions that will negatively affect the operating budget. Basic hedges include:

Swap contract – a bilateral agreement with a party that agrees to guarantee a ‘fixed’ price;

Future contract – a financial tool that limits upside price exposure;

Options contract – a financial tool that can limit upside and downside price exposure (‘puts’ are a hedge against falling prices, and ‘calls’ are a hedge against rising prices).

Politicians at local and national levels have evaluated sustainability as an important issue facing the communities. The future will have leaders who develop sustainable solid waste programmes that further improve the community to achieve the following:

Reduce the generation of solid waste by establishing policies that encourage manufacturers to reduce packaging material volumes;

Promote the development of ‘green’ local secondary material manufacturing facilities through implementation of tax credits and incentives;

Thermally treat the remaining waste by either incineration or gasification and produce renewable ‘green power’ or ‘green energy’;

Landfill the discarded/unusable material and reuse/recycle/recover the pre-collection waste.

In compiling energy consumption data one can categorise usage according to a number of different schemes:

Traditional sector – industrial, transportation etc.

End-use – space heating, process steam etc.

Final demand – total energy consumption related to automobiles, to food etc.

Energy source – oil, coal etc.

Energy form at point of use – electric drive, low temperature heat, etc.

Table 11 lists the energy sources available. Table 12 presents some renewable applications.

Considerations when selecting power plant include the following:

Power level – whether continuous or discontinuous;

Cost – initial cost, total running cost including fuel, maintenance and capital amortised over life;

Complexity of operation;

Maintenance and availability of spares;

Life;

Suitability for local manufacture.

Table 13 lists the most important of energy needs. Table 14 lists methods of energy conversion.

A great amount of renewable energy potential, environmental interest, as well as economic consideration of fossil fuel consumption and high emphasis of sustainable development for the future will be needed. Explanations for the use of inefficient agricultural-environmental policies include: the high cost of information required to measure benefits on a site-specific basis, information asymmetries between government agencies and farm decision makers that result in high implementation costs, distribution effects and political considerations. 18-20 The aim of agri-environmental schemes can be achieved through:

Sustaining the beauty and diversity of the landscape;

Improving and extending wildlife habitats;

Conserving archaeological sites and historic features;

Improving opportunities for countryside enjoyment;

Restoring neglected land or features, and

Creating new habitats and landscapes.

In some countries, a wide range of economic incentives and other measures are already helping to protect the environment. These include:

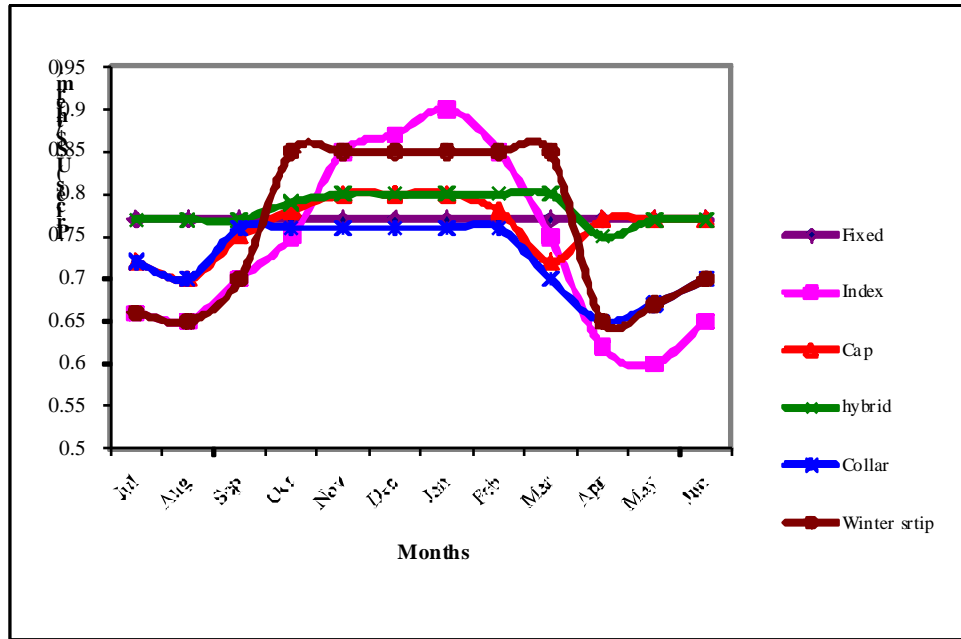


Fig. 7. Purchasing strategies using hedges.

**Table 10**  
Purchasing strategies using hedges.

Strategy	Description
Index	Fuel is purchased month-by-month at a first of the month index price
Forward physical purchase	Monthly fuel is purchased in advance for an averaged fixed price
Cap	A fixed price for fuel is set, but 'put' contracts are purchased to guarantee that when future market prices for fuel settle below the fixed cost, the monthly price is adjusted downward towards the tower index price
Collar	A series of 'put' and 'call' contracts are purchased to guarantee that monthly prices for fossil fuel will be contained within a defined price range regardless of market conditions
Hybrid	Where a percentage of each month's fuel needs are purchased at a fixed price, and the remainder purchased at an index price
Winter strip	Fuel purchased at a fixed price from November to March, and at an index price all other months

Taxes and user charges that reflect the costs of using the environment, e.g., pollution taxes and waste disposal charges;

Subsidies, credits and grants that encourage environmental protection;

Deposit-refund systems that prevent pollution on resource misuse and promote product reuse or recycling;

Financial enforcement incentives, e.g., fines for non-compliance with environmental regulations;

Tradable permits for activities that harm the environment.

District Heating (DH), also known as community heating, can be a key factor to achieve energy savings, reduce CO2 emissions and at the same time provide consumers with a high quality heat supply at a competitive price. DH should generally only be considered for areas where the heat density is sufficiently high to make DH economical. In countries like Denmark, DH may be economical today even to new developments with lower

density areas due to the high level of taxation on oil and gas fuels combined with the efficient production of DH.21-30 To improve the opportunity for DH, local councils can adapt the following plan:

Analyse the options for heat supply during local planning stage;

In areas where DH is the least costly solution it should be made part of the infrastructure just like for instance water and sewage connecting all existing and new buildings;

Where possible all public buildings should be connected to DH;

The government provides low interest loans or funding to minimise conversion costs for its citizens;

Use other powers, for instance national legislation to ensure the most economical development of the heat supply and enable an obligation to connect buildings to a DH scheme.

**Table 11**  
Sources of energy.

Energy source	Energy carrier	Energy end-use
Vegetation	Fuel wood	Cooking
		Water heating
		Building materials
		Animal fodder preparation
Oil	Kerosene	Lighting
		Ignition fires
Dry cells	Dry cell batteries	Lighting
		Small appliances
Muscle power	Animal power	Transport
		Land preparation for farming
		Food preparation (threshing)
Muscle power	Human power	Transport
		Land preparation for farming
		Food preparation (threshing)

**Table 12**  
Renewable applications.

Systems	Applications
Water supply	Rain collection, purification, storage and recycling
Wastes disposal	Anaerobic digestion (CH <sub>4</sub> )
Cooking	Methane
Food	Cultivate the 1 hectare plot and greenhouse for four people
Electrical demands	Wind generator
Space heating	Solar collectors
Water heating	Solar collectors and excess wind energy
Control system	Ultimate hardware
Building fabric	Integration of subsystems to cut costs

## 5. Recommendations

1. The introduction of biogas technology on a wide scale has implications for macro-planning, such as the allocation of government investment and effects on the balance of payments. Factors that determine the rate of acceptance of biogas plants, such as credit facilities and technical backup services, are likely to have to be planned as part of general macro-policy, as do the allocation of research and development funds.

2. In some rural communities, cultural beliefs regarding handling animal dung are prevalent and will influence the acceptability of biogas technology.

3. Co-ordination of production and use of biogas, fertiliser and pollution control can optimise the promotion and development of agricultural and animal husbandry in rural areas.

**Table 13**

Energy needs in rural areas.

**Energy needs**

Transport, e.g., small vehicles and boats  
 Agricultural machinery, e.g., two-wheeled tractors  
 Crop processing, e.g., milling  
 Water pumping  
 Small industries, e.g., workshop equipment  
 Electricity generation, e.g., hospitals and schools  
 Domestic, e.g., cooking, heating, and lighting

**5. Conclusion**

(1) Biogas technology cannot only provide fuel, but is also important for comprehensive utilisation of biomass forestry, animal husbandry, fishery, and agricultural residues; and protecting the environment, realising agricultural recycling, as well as improving the sanitary conditions, in rural areas.

(2) The biomass energy, one of the important options, which might gradually replace the oil in facing the increased demand for oil and may be an advanced period in this century. Any county can depend on the biomass energy to satisfy part of local consumption.

(3) Development of biogas technology is a vital component of alternative rural energy programme, whose potential is yet to be exploited. A concerted effort is required by all if this is to be realised. The technology will find ready use in domestic, farming, and small-scale industrial applications.

(4) Support biomass research and exchange experiences with countries that are advanced in this field. In the meantime, the biomass energy can help to save exhausting the oil wealth.

(5) The diminishing agricultural land may hamper biogas energy development but appropriate technological and resource management techniques will offset the effects.

**Table 14**

Methods of energy conversion.

Muscle power	Man, animals
Internal combustion engines	
Reciprocating	Petrol – spark ignition Diesel – compression ignition Humphrey water piston
Rotating	Gas turbines
Heat engines	
Vapour (Rankine)	
Reciprocating	Steam engine
Rotating	Steam turbine
Gas Stirling (Reciprocating)	Steam engine
Gas Brayton (Rotating)	Steam turbine
Electron gas	Thermionic, thermoelectric
Electromagnetic radiation	Photo devices
Hydraulic engines	Wheels, screws, buckets, turbines
Wind engines (wind machines)	Vertical axis, horizontal axis
Electrical/mechanical	Dynamo/alternator, motor



## References

- Robinson, G., 2007. Changes in construction waste manag. *Waste Manag. World.*, p. 43-49. May-June 2007.
- Sims, R.H., 2007. Not too late: IPCC identifies renewable energy as a key measure to limit climate change. *Renew. Energ. World.*, 10 (4), 31-39.
- Omer, A.M., et al., 2003. Biogas energy technology in Sudan. *Renew. Energ.*, 28 (3), 499-507.
- Omer, A.M., 2007. Review: Organic waste treatment for power production and energy supply. *Cell. Anim. Biol.*, 1 (2), 34-47.
- Omer, A.M., 2007. Renewable energy resources for electricity generation. *Renew.Sustain. Energ. Rev.*, Vol., 11, No.7, p. 1481-1497, United Kingdom, September 2007.
- Bacaoui, A., Yaacoubi, A., Dahbi, C., Bennouna, J., Mazet, A., 1998. Activated carbon production from Moroccan olive wastes-influence of some factors. *Environ. Tech.*, 19, 1203-1212.
- Rossi, S., Arnone, S., Lai, A., Lapenta, E., Sonnino, A., 1990. ENEA's activities for developing new crops for energy and industry. In: *Biomass for Energy and Industry* (G. Grassi, G. Gosse, G. dos Santos Eds.). Vol.1, p.107-113, Elsevier Appl. Sci., London and New York.
- Omer, A.M., 1996. Renewable energy potential and future prospects in Sudan. *Agr. Dev. Arab World.*, 3, 4-13.
- FAO., 2009. State of the world's forest. Rome, FAO.
- HariPriye G., 2000. Estimation of biomass in India forests. *Biomass Bioenergy.*, 19, 245-58.
- Hall O., Scrase J., 1998. Will biomass be the environmentally friendly fuel of the future. *Biomass Bioenergy.*, 15, 357-67.
- Omer, A.M. 2005. Biomass energy potential and future prospect in Sudan. *Renew. Sustain. Energ. Rev.*, 9, 1-27.
- Singh., et al., 2008. Biomass conversion to energy in India: a critique. *Renew. Sustain. Energ. Rev.*, 14, 1367-1378.
- Duku., et al., 2009. Comprehensive review of biomass resources and biofuels potential in Ghana. *Renew. Sustain. Energ. Rev.*, 15, 404-415.
- Cheng., et al., 2010. Advanced biofuel technologies: status and barriers. *World Bank Rep.*, WPS5411.
- Bessou., et al., 2009. Biofuels, greenhouse gases and climate change. *Agronomy Sustain. Dev.*, DOI: 10.1051/agro/2009039.
- Omer, A.M., 2008. Green energies and environment. *Renew. Sustain. Energ. Rev.*, 12, 1789-1821.
- Pernille, M., 2004. Feature: Danish lessons on district heating. *Energ. Resource Sustain. Manag. Environ.*, March/April 2004, 16-17.
- Erlich, P., 1991. Forward facing up to climate change, in *Global Climate Change and Life on Earth*. R. C. Wyman (Ed), Chapman and Hall, London.
- D'Apote, S.L., 1998. IEA biomass energy analysis and projections. In: *Proceedings of Biomass Energy Conference: Data, analysis and Trends*, Paris.,OECD; 23-24 March 1998.
- International Energy Agency (IEA)., 2007. *Indicators for industrial Energy Efficiency and CO2 Emissions. A Technol. Perspective.* 2007.
- Herath, G., 1985. *The Green Revolution in Asia: productivity, employment and the role of policies.* Oxford Agrarian Studies. 14, 52-71.
- Brain, G., Mark, S., 2007. Garbage in, energy out: landfill gas opportunities for CHP projects. *Cogeneration and On-Site Power*, 8 (5), 37-45. 2007.
- Abdeen, M.O., 2008. Chapter 10: Development of integrated bioenergy for improvement of quality of life of poor people in developing countries, In: *Energy in Europe: Economics, Policy and Strategy- IB*, Editors: Flip L. Magnusson and Oscar W. Bengtsson, 2008 NOVA Sci. Publishers, Inc., p.341-373, New York, USA.
- Omer, A.M., 2009. Environmental and socio-economic aspect of possible development in renewable energy use, In: *Proceedings of the 4th International Symposium on Environment.* Athens. Greece., 21-24 May 2009.
- Omer, A.M., 2009. Energy consumption, environment and sustainable development, In: *Proceedings of the 3rd International Conference on Sustainable Energy and Environmental Protection (SEEP 2009)*, Paper No.1011, Dublin, Republic Ireland., 12-15 August 2009.
- Omer, A.M., 2009. Energy use and environmental: impacts: a general review. *J.Renew. Sustain. Energ.*, Vol.1, No.053101, p.1-29, United State of America, September 2009.
- Omer, A.M., 2009. Chapter 3: Energy use, environment and sustainable development, In: *Environmental Cost Management*, Editors: Randi Taylor Mancuso, 2009 NOVA Science Publishers, Inc., p.129-166, New York, USA, 2009.

- UNEP., 2003. Handbook for the International Treaties for the Protection of the Ozone Layer. Unit. Nation. Environ.t Programme. Nairobi: Kenya.
- World Bank., 2004. World Development Report 2004: Making Services Work for Poor People, World Bank.Washington., DC.