

Contents lists available at Sjournals

Scientific Journal of  
**Pure and Applied Sciences**

Journal homepage: [www.Sjournals.com](http://www.Sjournals.com)



**Original article**

## **Sustainable development of bioheat from agricultural wastes and environment**

**A.M. Omer**

*Energy Research Institute (ERI), Nottingham, UK.*

\*Corresponding author; Energy Research Institute (ERI), Nottingham, UK.

### ARTICLE INFO

*Article history,*

Received 11 February 2015

Accepted 16 March 2015

Available online 27 March 2015

*Keywords,*

Bioenergy

Agricultural wastes

Environment

Sustainable development

### ABSTRACT

This Article discusses a comprehensive review of biomass energy sources, environment and sustainable development. This includes all the biomass energy technologies, energy efficiency systems, energy conservation scenarios, energy savings and other mitigation measures necessary to reduce emissions. The current literature is reviewed regarding the ecological, social, cultural and economic impact of biomass technology. This article gives an overview of present and future use of biomass as an industrial feedstock for production of fuels, chemicals and other materials. However, to be truly competitive in an open market situation, higher value products are required. Results suggest that biomass technology must be encouraged, promoted, invested, implemented, and demonstrated but especially in remote rural areas.

© 2015 Sjournals. All rights reserved.

### **1. Introduction**

There is strong scientific evidence that the average temperature of the earth's surface is rising, it is attributed to the increased concentration of carbon dioxide (CO<sub>2</sub>), and other greenhouse gases (GHGs) in the atmosphere as released by burning fossil fuels (Robinson, 2007; Omer, 2008). This global warming will eventually lead to substantial changes in the world's climate, which will, in turn, have a major impact on human life and the environment. Energy use can be achieved by minimising the energy demand, by rational energy use, by recovering heat and the use of more green energies. This will lead to fossil fuels emission reduction. This study is a step towards achieving this goal. The adoption of green or sustainable approaches, to the way in which society is run, is seen as an important strategy in finding a solution to the energy problem. The key factors to reducing and

controlling CO<sub>2</sub>, which is considered by many scientists the major contributor to global warming, are the use of alternative approaches to energy generation and the exploration of how these alternatives are used today and may be used in the future as green energy sources. Even with modest assumptions about the availability of land, comprehensive fuel-wood farming programmes offer significant energy, economic and environmental benefits. These benefits would be dispersed in rural areas where they are greatly needed and can serve as linkages for further rural economic development. The nations as a whole would benefit from savings in foreign exchange, improved energy security, and socio-economic improvements. With a nine-fold increase in forest – plantation cover, the nation's resource base would be greatly improved (Sims, 2007). The non-technical issues, which have recently gained attention, include: (1) Environmental and ecological factors, e.g., carbon sequestration, reforestation and revegetation. (2) Renewables as a CO<sub>2</sub> neutral replacement for fossil fuels. (3) Greater recognition of the importance of renewable energy, particularly modern biomass energy carriers, at the policy and planning levels. (4) Greater recognition of the difficulties of gathering good and reliable biomass energy data, and efforts to improve it. (5) Studies on the detrimental health effects of biomass energy particularly from traditional energy users. There is a need for some further development to suit local conditions, to minimise spare holdings, to maximise the interchangeability of both engine parts and the engine application. Emphasis should be placed on full local manufacture (Abdeen, 2008a).

Energy is an essential factor in development since it stimulates, and supports economic growth and development. Fossil fuels, especially oil and natural gas, are finite in extent, and should be regarded as depleting assets, and efforts are oriented to search for new sources of energy. The clamour all over the world for the need to conserve energy and the environment has intensified as traditional energy resources continue to dwindle whilst the environment becomes increasingly degraded. Alternatively energy sources can potentially help fulfil the acute energy demand and sustain economic growth in many regions of the world. Bioenergy is beginning to gain importance in the global fight to prevent climate change. The scope for exploiting organic waste as a source of energy is not limited to direct incineration or burning refuse-derived fuels. Biogas, biofuels and woody biomass are other forms of energy sources that can be derived from organic waste materials. These biomass energy sources have significant potential in the fight against climate change (Abdeen, 2008b).

Conservation of energy and rationing in some form will however have to be practised by most countries, to reduce oil imports and redress balance of payments positions. Meanwhile development and application of nuclear power and some of the traditional solar, wind, biomass and water energy alternatives must be set in hand to supplement what remains of the fossil fuels. The encouragement of greater energy use is an essential component of development. In the short term it requires mechanisms to enable the rapid increase in energy/capita, and in the long term we should be working towards a way of life, which makes use of energy efficiency and without the impairment of the environment or of causing safety problems. Such a programme should as far as possible be based on renewable energy resources (Abdeen, 2008c). Large-scale, conventional, power plant such as hydropower has an important part to play in development. It does not, however, provide a complete solution. There is an important complementary role for the greater use of small scale, rural based-power plants. Such plant can be used to assist development since it can be made locally using local resources, enabling a rapid build-up in total equipment to be made without a corresponding and unacceptably large demand on central funds. Renewable resources are particularly suitable for providing the energy for such equipment and its use is also compatible with the long-term aims.

## **2. Materials and methods**

This study highlights the energy problem and the possible saving that can be achieved through the use of biomass sources energy. Also, this study clarifies the background of the study, highlights the potential energy saving that could be achieved through use of biomass energy source and describes the objectives, approach and scope of the theme.

The aim of any modern biomass energy systems must be:

- To maximise yields with minimum inputs.
- Utilisation and selection of adequate plant materials and processes.
- Optimum use of land, water, and fertiliser.
- Create an adequate infrastructure and strong research and development (R&D) base.

In compiling energy consumption data one can categorize usage according to a number of different schemes:

- Traditional sector- industrial, transportation, etc.
- End-use- space heating, process steam, etc.
- Final demand- total energy consumption related to automobiles, to food, etc.
- Energy source- oil, coal, etc.
- Energy form at point of use- electric drive, low temperature heat, etc.

### 3. Results and discussions

#### 3.1. Bioenergy development

Bioenergy is energy from the sun stored in materials of biological origin. This includes plant matter and animal waste, known as biomass. Plants store solar energy through photosynthesis in cellulose and lignin, whereas animals store energy as fats. When burned, these sugars break down and release energy exothermically, releasing carbon dioxide (CO<sub>2</sub>), heat and steam. The by-products of this reaction can be captured and manipulated to create power, commonly called bioenergy. Biomass is considered renewable because the carbon (C) is taken out of the atmosphere and replenished more quickly than the millions of years required for fossil fuels to form. The use of biofuel to replace fossil fuels contributes to a reduction in the overall release of carbon dioxide into the atmosphere and hence helps to tackle global warming (Abdeen, 2008d).

The biomass energy resources are particularly suited for the provision of rural power supplies and a major advantage is that equipment such as flat plate solar driers, wind machines, etc., can be constructed using local resources and without the high capital cost of more conventional equipment. Further advantage results from the feasibility of local maintenance and the general encouragement such local manufacture gives to the build up of small scale rural based industry. Table 1 lists the energy sources available. Currently the ‘non-commercial’ fuels wood, crop residues and animal dung are used in large amounts in the rural areas of developing countries, principally for heating and cooking; the method of use is highly inefficient. Table 2 presented some renewable applications. Table 3 lists the most important of energy needs. Table 4 listed methods of energy conversion.

**Table 1**  
Sources of energy (Omer, 2008).

Energy source	Energy carrier	Energy end-use
Vegetation	Fuel-wood	Cooking Water heating Building materials Animal fodder preparation
Oil	Kerosene	Lighting Ignition fires
Dry cells	Dry cell batteries	Lighting Small appliances
Muscle power	Animal power	Transport Land preparation for farming Food preparation (threshing)
Muscle power	Human power	Transport Land preparation for farming Food preparation (threshing)

**Table 2**

Renewable applications (Omer, 2008).

Systems	Applications
Water supply	Rain collection, purification, storage and recycling
Wastes disposal	Anaerobic digestion (CH <sub>4</sub> )
Cooking	Methane
Food	Cultivate the 1 hectare plot and greenhouse for four people
Electrical demands	Wind generator
Space heating	Solar collectors
Water heating	Solar collectors and excess wind energy
Control system	Ultimately hardware
Building fabric	Integration of subsystems to cut costs

Considerations when selecting power plant include the following:

- Power level- whether continuous or discontinuous.
- Cost- initial cost, total running cost including fuel, maintenance and capital over life.
- Complexity of operation.
- Maintenance and availability of spares.
- Life and suitability for local manufacture.

**Table 3**

Energy needs in rural areas (Omer, 2008).

Transport, e.g., small vehicles and boats
Agricultural machinery, e.g., two-wheeled tractors
Crop processing, e.g., milling
Water pumping
Small industries, e.g., workshop equipment
Electricity generation, e.g., hospitals and schools
Domestic, e.g., cooking, heating, lighting

**Table 4**

Methods of energy conversion (Omer, 2007).

Muscle power	Man, animals
Internal combustion engines	
Reciprocating	Petrol- spark ignition Diesel- compression ignition Humphrey water piston
Rotating	Gas turbines
Heat engines	
Vapour (Rankine)	
Reciprocating	Steam engine
Rotating	Steam turbine
Gas Stirling (Reciprocating)	Steam engine
Gas Brayton (Rotating)	Steam turbine
Electron gas	Thermionic, thermoelectric
Electromagnetic radiation	Photo devices
Hydraulic engines	Wheels, screws, buckets, turbines
Wind engines (wind machines)	Vertical axis, horizontal axis
Electrical/mechanical	Dynamo/alternator, motor

The internal combustion engine is a major contributor to rising CO<sub>2</sub> emissions worldwide and some pretty dramatic new thinking is needed if our planet is to counter the effects. With its use increasing in developing world

economies, there is something to be said for the argument that the vehicles. We use to help keep our inner-city environments free from waste, litter and grime and should be at the forefront of developments in low-emissions technologies. Materials handled by waste management companies are becoming increasingly valuable. Those responsible for the security of facilities that treat waste or manage scrap will testify to the precautions needed to fight an on-going battle against unauthorised access by criminals and crucially, to prevent the damage they can cause through theft, vandalism or even arson. Of particular concern is the escalating level of metal theft, driven by various factors including the demand for metal in rapidly developing economies such as India and China (Abdeen, 2008e).

There is a need for greater attention to be devoted to this field in the development of new designs, the dissemination of information and the encouragement of its use. International and government bodies and independent organisations all have a role to play in biomass energy technologies. Environment has no precise limits because it is in fact a part of everything. Indeed, environment is, as anyone probably already knows, not only flowers blossoming or birds singing in the spring, or a lake surrounded by beautiful mountains. It is also human settlements, the places where people live, work, rest, the quality of the food we eat, the noise or silence of the street they live in. Environment is not only the fact that our cars consume a good deal of energy and pollute the air, but also, that we often need them to go to work and for holidays. Obviously man uses energy just as plants, bacteria, mushrooms, bees, fish and rats do. Figure 1 shows biomass utilisation cycle concepts. Man largely uses solar energy, food, hydropower, wood and thus participates harmoniously in the natural flow of energy through the environment. But man also uses oil, gas, coal and nuclear power. We always modify our environment with or without this source of energy (Brain, and Mark, 2007). Economic importance of environmental issue is increasing, and new technologies are expected to reduce pollution derived both from productive processes and products, with costs that are still unknown. This is due to market uncertainty, weak appropriateness. Raslavicius, Grzybek, and Dubrovin (2011) investigated prospects of bioenergy in Lithuania and Ukraine and put emphasis on agricultural waste-for-energy production technologies as well as on impact of bioenergy towards the improvement of the quality of life in rural communities.

### 3.2. Energy use and the environment

The range of waste treatment technologies that are tailored to produce bioenergy is growing. There are a number of key areas of bioenergy from wastes including (but not limited to) biogas, biofuel and bio-heat. When considering using bioenergy, it is important to take into account the overall emission of carbon in the process of electricity production. Energy use is one of several essential components for every country:

- The overall situation and the implications of increased energy use in the future.
- The problem of the provision of power in rural areas, including the consideration of energy resources and energy conversion.

**Table 5**

Annual GHG emissions from different types of power plants (Robinson, 2007).

Primary source of energy	Emissions (x 103 metric tons CO <sub>2</sub> )		Waste (x 103 metric tons CO <sub>2</sub> )	Area (km <sup>2</sup> )
	Atmosphere	Water		
Coal	380	7-41	60-3000	120
Oil	70-160	3-6	Negligible	70-84
Gas	24	1	-	84
Nuclear	6	21	2600	77

**Table 6**

Energy consumption per person (Robinson, 2007).

Region	Population (millions)	Energy per person (Watt/m <sup>2</sup> )
Africa	820	0.54
Asia	3780	2.74
Central America	180	1.44

North America	335	0.34
South America	475	0.52
Western Europe	445	2.24
Eastern Europe	130	2.57
Oceania	35	0.08
Russia	330	0.29

In addition to the drain on resources, such an increase in consumption consequences, together with the increased hazards of pollution and the safety problems associated with a large nuclear fission programmes. It would be equally unacceptable to suggest that the difference in energy between the developed and developing countries and prudent for the developed countries to move towards a way of life which, whilst maintaining or even increasing quality of life, reduce significantly the energy consumption per capita. Such savings can be achieved in a number of ways:

- Improved efficiency of energy use, for example environmental cost of thermal insulation must be taken into account, energy recovery, and total energy.
- Conservation of energy resources by design for long life and recycling rather than the short life throwaway product and systematic replanning of our way of life, for example in the field of transport.

Energy ratio is defined as the ratio of: Energy content of the food product / Energy input to produce the food:  
 $E_r = E_c/E_i$  (1)

Where  $E_r$  is the energy ratio,  $E_c$  is the energy content of the food product, and  $E_i$  is the energy input to produce the food.

### 3.3. Combined heat and power (CHP)

The atmospheric emissions of fossil fuelled installations are mostly aldehydes ( $CH_3CH_2CH_2CHO$ ), carbon monoxide (CO), nitrogen oxides (NOX), sulphur oxides (SOx) and particles (i.e., ash) as well as carbon dioxide. Table 5 shows estimates and includes not only the releases occurring at the power plant itself but also cover fuel extraction and treatment, as well as the storage of wastes and the area of land required for operation. Table 6 shows energy consumption per person worldwide. A review of the potential range of recyclables is presented in Table 7.

Combined heat and power (CHP) installations are quite common in greenhouses, which grow high-energy, input crops (e.g., salad vegetables, pot plants, etc.). Scientific assumptions for a short-term energy strategy suggest that the most economically efficient way to replace the thermal plants is to modernise existing power plants to increase their energy efficiency and to improve their environmental performance (Pernille, 2004).

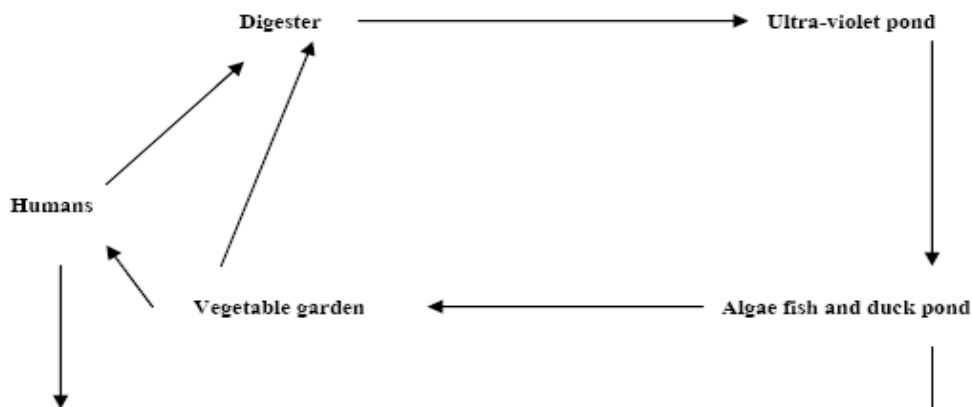


Fig. 1. Biomass utilisation cycle concepts (Omer, 2006).

A total shift towards a sustainable energy system is a complex and long process, but is one that can be achieved within a period of about 20 years. Implementation will require initial investment, long-term national

strategies and action plans. However, the changes will have a number of benefits including: a more stable energy supply than at present and major improvement in the environmental performance of the energy sector, and certain social benefits. Figure 2 shows methanol production. A vision that used methodologies and calculations based on computer modelling can utilise:

- Data from existing governmental programmes.
- Potential renewable energy sources and energy efficiency improvements.
- Assumptions for future economy growth.
- Information from studies and surveys on the recent situation in the energy sector.

The main advantages are related to energy, agriculture and environment problems, are foreseeable both at national level and at worldwide level and can be summarised as follows:

- Reduction of dependence on import of energy and related products.
- Reduction of environmental impact of energy production (greenhouse effect, air pollution, and waste degradation).
- Substitution of food crops and reduction of food surpluses and of related economic burdens, and development of new know-how and production of technological innovation.
- Utilisation of marginal lands and of set aside lands and reduction of related socio-economic and environmental problems (soil erosion, urbanisation, landscape deterioration, etc.).

**Table 7**

Summary of material recycling practices in the construction sector (Robinson, 2007).

<b>Construction and demolition material</b>	<b>Recycling technology options</b>	<b>Recycling product</b>
Asphalt	Cold recycling: heat generation; Minnesota process; parallel drum process; elongated drum; microwave asphalt recycling system; finfalt; surface regeneration	Recycling asphalt; asphalt aggregate
Brick	Burn to ash, crush into aggregate	Slime burn ash; filling material; hardcore
Concrete	Crush into aggregate	Recycling aggregate; cement replacement; protection of levee; backfilling; filter
Ferrous metal	Melt; reuse directly	Recycled steel scrap

Glass	Reuse directly; grind to powder; polishing; crush into aggregate; burn to ash	Recycled window unit; glass fibre; filling material; tile; paving block; asphalt; recycled aggregate; cement replacement; manmade soil
Masonry	Crush into aggregate; heat to 900oC to ash	Thermal insulating concrete; traditional clay
Non-ferrous metal	Melt	Recycled metal
Paper and cardboard	Purification	Recycled paper
Plastic	Convert to powder by cryogenic milling; clopping; crush into aggregate; burn to ash	Panel; recycled plastic; plastic lumber; recycled aggregate; landfill drainage; asphalt; manmade soil
Timber	Reuse directly; cut into aggregate; blast furnace deoxidisation; gasification or pyrolysis; chipping; moulding by pressurising timber chip under steam and water	Whole timber; furniture and kitchen utensils; lightweight recycled aggregate; source of energy; chemical production; wood-based panel; plastic lumber; geofibre; insulation board

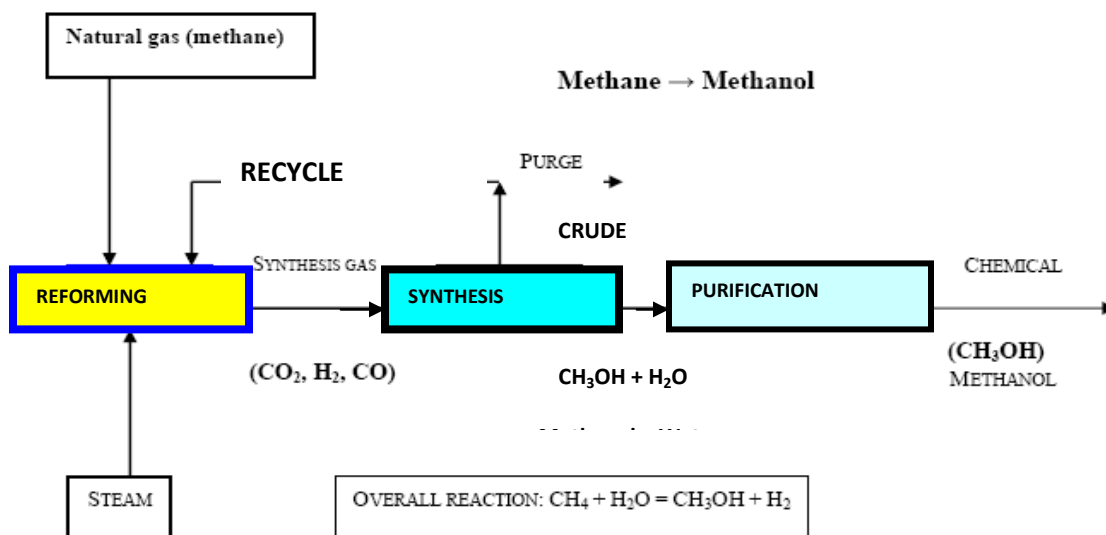


Fig. 2. Schematic diagram shows methanol production (Omer, 2006).

However, utilisation of wind power and the conversion of gas-fired CHP plants to biomass would significantly reduce the dependence on imported fossil fuels. Although a lack of generating capacity is forecast in the long-term, utilisation of the existing renewable energy potential and the huge possibilities for increasing energy efficiency are sufficient to meet future energy demands in the short-term (Pernille, 2004).

In some countries, a wide range of economic incentives and other measures are already helping to protect the environment. These include:

- Taxes and user charges that reflect the costs of using the environment, e.g., pollution taxes and waste disposal charges.
- Subsidies, credits and grants that encourage environmental protection.
- Deposit-refund systems that prevent pollution on resource misuse and promote product reuse or recycling.
- Financial enforcement incentives, e.g., fines for non-compliance with environmental regulations.
- Tradable permits for activities that harm the environment.



District Heating (DH), also known as community heating can be a key factor to achieve energy savings, reduce CO<sub>2</sub> emissions and at the same time provide consumers with a high quality heat supply at a competitive price. DH should generally only be considered for areas where the heat density is sufficiently high to make DH economical. In countries like Denmark DH may today be economical even to new developments with lower density areas due to the high level of taxation on oil and gas fuels combined with the efficient production of DH. To improve the opportunity for DH local councils can adapt the following plan:

- Analyse the options for heat supply during local planning stage.
- In areas where DH is the least cost solution it should be made part of the infrastructure just like for instance water and sewage connecting all existing and new buildings.
- Where possible all public buildings should be connected to DH.
- The government provides low interest loans or funding to minimise conversion costs for its citizens.
- Use other powers, for instance national legislation to ensure the most economical development of the heat supply and enable an obligation to connect buildings to a DH scheme.

Denmark has broadly seen three scales of CHP which were largely implemented in the following chronological order (Pernille, 2004):

- Large scale CHP in cities (>50 MWe).
- Small (5 kWe – 5 MWe) and medium scale (5-50 MWe).
- Industrial and small scale CHP.

Combined heat and power (CHP) installations are quite common in greenhouses, which grow high-energy, input crops (e.g., salad vegetables, pot plants, etc.). Most of the heat is produced by large CHP plants (gas-fired combined cycle plants using natural gas, biomass, waste or biogas). DH is energy efficient because of the way the heat is produced and the required temperature level is an important factor. Buildings can be heated to temperature of 21oC and domestic hot water (DHW) can be supplied with a temperature of 55oC using energy sources that are most efficient when producing low temperature levels (<95oC) for the DH water. Most of these heat sources are CO<sub>2</sub> neutral or emit low levels. Only a few of these sources are available to small individual systems at a reasonably cost, whereas DH schemes because of the plant's size and location can have access to most of the heat sources and at a low cost (IEA, 2008). Low temperature DH, with return temperatures of around 30-40oC can utilise the following heat sources:

- Efficient use of CHP by extracting heat at low calorific value (CV).
- Efficient use of biomass or gas boilers by condensing heat in economisers (Table 8).
- Efficient utilisation of geothermal energy.
- Direct utilisation of excess low temperature heat from industrial processes.
- Efficient use of large-scale solar heating plants.

**Table 8**  
Final energy projections including biomass (Mtoe) (D'Apote, 1998).

Region	1995			Share of Biomass (%)
	Biomass	Conventional Energy	Total	
Africa	205	136	341	60
China	206	649	855	24
East Asia	106	316	422	25
Latin America	73	342	415	18
South Asia	235	188	423	56
Total developing countries	825	1632	2457	34
Other non-OECD countries*	24	1037	1061	2
Total non-OECD countries	849	2669	3518	24
OECD countries	81	3044	3125	3
World	930	5713	6643	14
Region	2020			Share of Biomass (%)
	Biomass	Conventional Energy	Total	

Africa	371	266	637	59
China	224	1524	1748	13
East Asia	118	813	931	13
Latin America	81	706	787	10
South Asia	276	523	799	35
Total developing countries	1071	3825	4896	22
Other non-OECD countries	26	1669	1695	2
Total non-OECD countries	1097	5494	6591	17
OECD countries	96	3872	3968	2
World	1193	9365	10558	11

\* Organisation for Economic Co-operation Development

Heat tariffs may include a number of components such as: a connection charge, a fixed charge and a variable energy charge. Also, consumers may be incentivised to lower the return temperature. Hence, it is difficult to generalise but the heat practice for any DH company no matter what the ownership structure can be highlighted as follows:

- To develop and maintain a development plan for the connection of new consumers.
- To evaluate the options for least cost production of heat.
- To implement the most competitive solutions by signing agreements with other companies or by implementing own investment projects.
- To monitor all internal costs and with the help of benchmarking, improve the efficiency of the company.
- To maintain a good relationship with the consumer and deliver heat supply services at a sufficient quality.

Installing DH should be pursued to meet the objectives for improving the environment through the improvement of energy efficiency in the heating sector. At the same time DH can serve the consumer with a reasonable quality of heat at the lowest possible cost. The variety of possible solutions combined with the collaboration between individual companies, the district heating association, the suppliers and consultants can, as it has been in Denmark, be the way forward for developing DH in the United Kingdom. Implementation will require initial investment, long-term national strategies and action plans. However, the changes will have a number of benefits including: a more stable energy supply than at present and major improvement in the environmental performance of the energy sector, and certain social benefits (Pernille, 2004).

### 3.4. Biomass utilisation and development of conversion technologies

Sustainable energy is energy that, in its production or consumption, has minimal negative impacts on human health and the healthy functioning of vital ecological systems, including the global environment. It is an accepted fact that renewable energy is a sustainable form of energy, which has attracted more attention during recent years. A great amount of renewable energy potential, environmental interest, as well as economic consideration of fossil fuel consumption and high emphasis of sustainable development for the future will be needed. Explanations for the use of inefficient agricultural-environmental policies include: the high cost of information required to measure benefits on a site-specific basis, information asymmetries between government agencies and farm decision makers that result in high implementation costs, distribution effects and political considerations (Wu and Boggess, 1999). Achieving the aim of agric-environment schemes through:

- Sustain the beauty and diversity of the landscape.
- Improve and extend wildlife habitats.
- Conserve archaeological sites and historic features.
- Improve opportunities for countryside enjoyment.
- Restore neglected land or features, and
- Create new habitats and landscapes.

The data required to perform the trade-off analysis simulation can be classified according to the divisions given in Table 9: the overall system or individual plants, and the existing situation or future development. The effective economic utilisations of these resources are shown in Table 10, but their use is hindered by many

problems such as those related to harvesting, collection, and transportation, besides the sanitary control regulations. Biomass energy is experiencing a surge in an interest stemming from a combination of factors, e.g., greater recognition of its current role and future potential contribution as a modern fuel, global environmental benefits, its development and entrepreneurial opportunities, etc. Possible routes of biomass energy development are shown in Table 11.

The key to successful future appears to lie with successful marketing of the treatment by products. There is also potential for using solid residue in the construction industry as a filling agent for concrete. Research suggests that the composition of the residue locks metals within the material, thus preventing their escape and any subsequent negative effect on the environment (Abdeen, 2009b).

The use of biomass through direct combustion has long been, and still is, the most common mode of biomass utilisation as shown in Tables (9-11). Examples for dry (thermo-chemical) conversion processes are charcoal making from wood (slow pyrolysis), gasification of forest and agricultural residues (fast pyrolysis – this is still in demonstration phase), and of course, direct combustion in stoves, furnaces, etc. Wet processes require substantial amount of water to be mixed with the biomass. Biomass technologies include:

- Briquetting.
- Improved stoves.
- Biogas.
- Improved charcoal.
- Carbonisation.
- Gasification.

**Table 9**  
Classifications of data requirements (Omer, 2008).

	Plant data	System data
Existing data	Size	Peak load
	Life	Load shape
	Cost (fixed and var. O and M)	Capital costs
	Forced outage	Fuel costs
	Maintenance	Depreciation
	Efficiency	Rate of return
	Fuel	Taxes
	Emissions	
Future data	All of above, plus	System lead growth
	Capital costs	Fuel price growth
	Construction trajectory	Fuel import limits
	Date in service	Inflation

**Table 10**  
Agricultural residues routes for development (Omer, 2006).

Source	Process	Product	End use
Agricultural residues	Direct	Combustion	Rural poor Urban household
	Processing	Briquettes	Industrial use Limited household use
	Processing	Carbonisation (small scale)	Rural household (self sufficiency)
	Carbonisation	Briquettes	Urban fuel
	Fermentation	Carbonised Biogas	Energy services Household Industry
Agricultural, and animal	Direct	Combustion	(Save or less efficiency as wood) (Similar end use devices or improved)

residues	Briquettes Carbonisation Carbonisation Fermentation	Direct combustion Carbonised Briquettes Biogas	Use Briquettes use Use
----------	--	---	------------------------------

The increased demand for gas and petroleum, food crops, fish and large sources of vegetative matter mean that the global harvesting of carbon has in turn intensified. It could be said that mankind is mining nearly everything except its waste piles. It is simply a matter of time until the significant carbon stream present in municipal solid waste is fully captured. In the meantime, the waste industry needs to continue on the pathway to increased awareness and better-optimised biowaste resources. Optimisation of waste carbon may require widespread regulatory drivers (including strict limits on the Landfilling of organic materials), public acceptance of the benefits of waste carbon products for soil improvements/crop enhancements and more investment in capital facilities (Abdeen, 2009c). In short, a significant effort will be required in order to capture a greater portion of the carbon stream and put it to beneficial use. From the standpoint of waste practitioners, further research and pilot programmes are necessary before the available carbon in the waste stream can be extracted in sufficient quality and quantities to create the desired end products. Other details need to be ironed out too, including measurement methods, diversion calculations, sequestration values and determination of acceptance contamination thresholds (Abdeen, 2009d).

### 3.4.1. Briquette

Charcoal stoves are very familiar to African society. As for the stove technology, the present charcoal stove can be used, and can be improved upon for better efficiency. This energy term will be of particular interest to both urban and rural households and all the income groups due to the simplicity, convenience, and lower air polluting characteristics. However, the market price of the fuel together with that of its end-use technology may not enhance its early high market penetration especially in the urban low income and rural households.

**Table 11**  
Effective biomass resource utilisation (Omer, 2007).

Subject	Tools	Constraints
Utilisation and land clearance for agriculture expansion	Stumpage fees	Policy
	Control	Fuel-wood planning
	Extension	Lack of extension
	Conversion	Institutional
Utilisation of agricultural residues	Technology	
	Briquetting	Capital
	Carbonisation	Pricing
	Carbonisation and briquetting	Policy and legislation
	Fermentation	Social acceptability
	Gasification	

Briquetting is the formation of a char (an energy-dense solid fuel source) from otherwise wasted agricultural and forestry residues. One of the disadvantages of wood fuel is that it is bulky with a low energy density and is therefore enquire to transport. Briquette formation allows for a more energy-dense fuel to be delivered, thus reducing the transportation cost and making the resource more competitive. It also adds some uniformity, which makes the fuel more compatible with systems that are sensitive to the specific fuel input (Jeremy, 2005).

### 3.4.2. Improved cook stoves

Traditional wood stoves can be classified into four types: three stone, metal cylindrical shaped, metal tripod and clay type. Another area in which rural energy availability could be secured where woody fuels have become scarce, is the improvement of traditional cookers and ovens to raise the efficiency of fuel saving. Additionally, planting fast growing trees provides a constant fuel supply. The rural development is essential and economically

important since it will eventually lead to better standards of living, people's settlement, and self sufficient in the following:

- Food and water supplies.
- Better services in education and health care.
- Good communication modes.

### **3.4.3. Biogas**

Biogas technology cannot only provide fuel, but is also important for comprehensive utilisation of biomass forestry, animal husbandry, fishery, agricultural economy, protecting the environment, realising agricultural recycling, as well as improving the sanitary conditions, in rural areas. The introduction of biogas technology on wide scale has implications for macro planning such as the allocation of government investment and effects on the balance of payments. Factors that determine the rate of acceptance of biogas plants, such as credit facilities and technical backup services, are likely to have to be planned as part of general macro-policy, as do the allocation of research and development funds (Hall and Scrase, 1998).


Biogas is a generic term for gases generated from the decomposition of organic material. As the material breaks down, methane (CH<sub>4</sub>) is produced as shown in Figure 3. Sources that generate biogas are numerous and varied. These include landfill sites, wastewater treatment plants and anaerobic digesters. Landfills and wastewater treatment plants emit biogas from decaying waste. To date, the waste industry has focused on controlling these emissions to our environment and in some cases, tapping this potential source of fuel to power gas turbines, thus generating electricity. The primary components of landfill gas are methane (CH<sub>4</sub>), carbon dioxide (CO<sub>2</sub>), and nitrogen (N<sub>2</sub>). The average concentration of methane is ~45%, CO<sub>2</sub> is ~36% and nitrogen is ~18%. Other components in the gas are oxygen (O<sub>2</sub>), water vapour and trace amounts of a wide range of non-methane organic compounds (NMOCs).

For hot water and heating, renewables contributions come from biomass power and heat, geothermal direct heat, ground source heat pumps, and rooftop solar hot water and space heating systems. Solar assisted cooling makes a very small but growing contribution. When it comes to the installation of large amounts of PV, the cities have several important factors in common. These factors include:

- A strong local political commitment to the environment and sustainability.
- The presence of municipal departments or offices dedicated to the environment, sustainability or renewable energy.
- Information provision about the possibilities of renewables.
- Obligations that some or all buildings include renewable energy.

### **3.4.4. Improved forest and tree management**

Dry cell batteries are a practical but expensive form of mobile fuel that is used by rural people when moving around at night and for powering radios and other small appliances. The high cost of dry cell batteries is financially constraining for rural households, but their popularity gives a good indication of how valuable a versatile fuel like electricity is in rural area (Ahmed, 2004). Dry cell batteries can constitute an environmental hazard unless they are recycled in a proper fashion. Direct burning of fuel-wood and crop residues constitute the main usage of biomass, as is the case with many developing countries. However, the direct burning of biomass in an inefficient manner causes economic loss and adversely affects human health. In order to address the problem of inefficiency, research centres around the world have investigated the viability of converting the resource to a more useful form, namely solid briquettes and fuel gas (Figure 4). Biomass resources play a significant role in energy supply in all developing countries. Biomass resources should be divided into residues or dedicated resources, the latter including firewood and charcoal can also be produced from forest residues (Table 12).

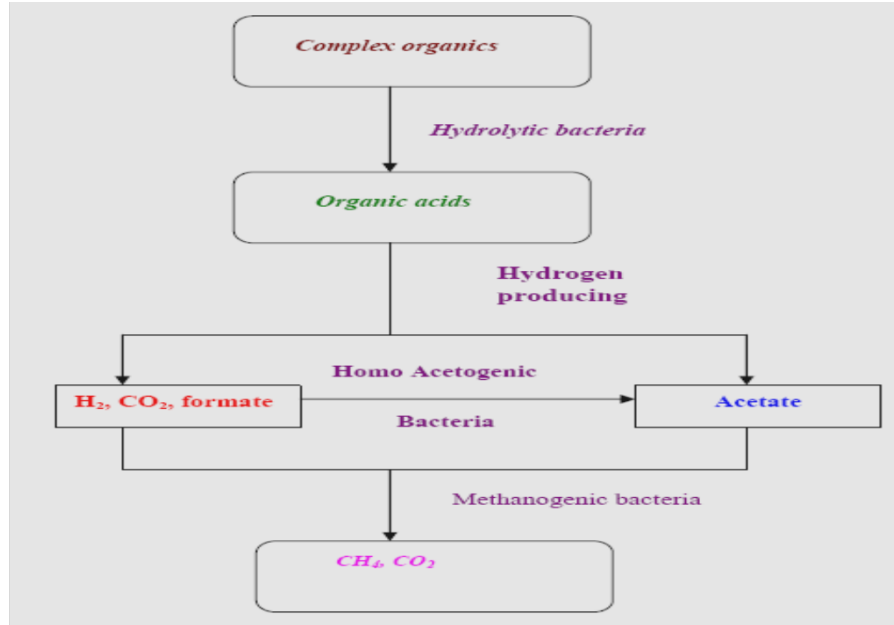

**Fig.3.** Biogas production process (Omer, 2003).

Implementing measures for energy efficiency has been increased at the demand side and in the energy transformation sector. It is common practice to dispose of this waste wood in landfill where it slowly degraded and takes up valuable void space. This wood is a good source of energy and is an alternative to energy crops. Agricultural wastes are abundantly available globally and can be converted to energy and useful chemicals by a number of microorganisms. The success of promoting any technology depends on careful planning, management, implementation, training and monitoring. Main features of gasification project are:

- Networking and institutional development/strengthening.
- Promotion and extension.
- Construction of demonstration projects.
- Research and development, and training and monitoring.

### 3.4.5. Gasification

Gasification is based on the formation of a fuel gas (mostly CO and H<sub>2</sub>) by partially oxidising raw solid fuel at high temperatures in the presence of steam or air. The technology can use wood chips, groundnut shells, sugar cane bagasse, and other similar fuels to generate capacities from 3 kW to 100 kW. Three types of gasifier designs have been developed to make use of the diversity of fuel inputs and to meet the requirements of the product gas output (degree of cleanliness, composition, heating value, etc.). The requirements of gas for various purposes, and a comparison between biogas and various commercial fuels in terms of calorific value, and thermal efficiency are presented in Table 13.

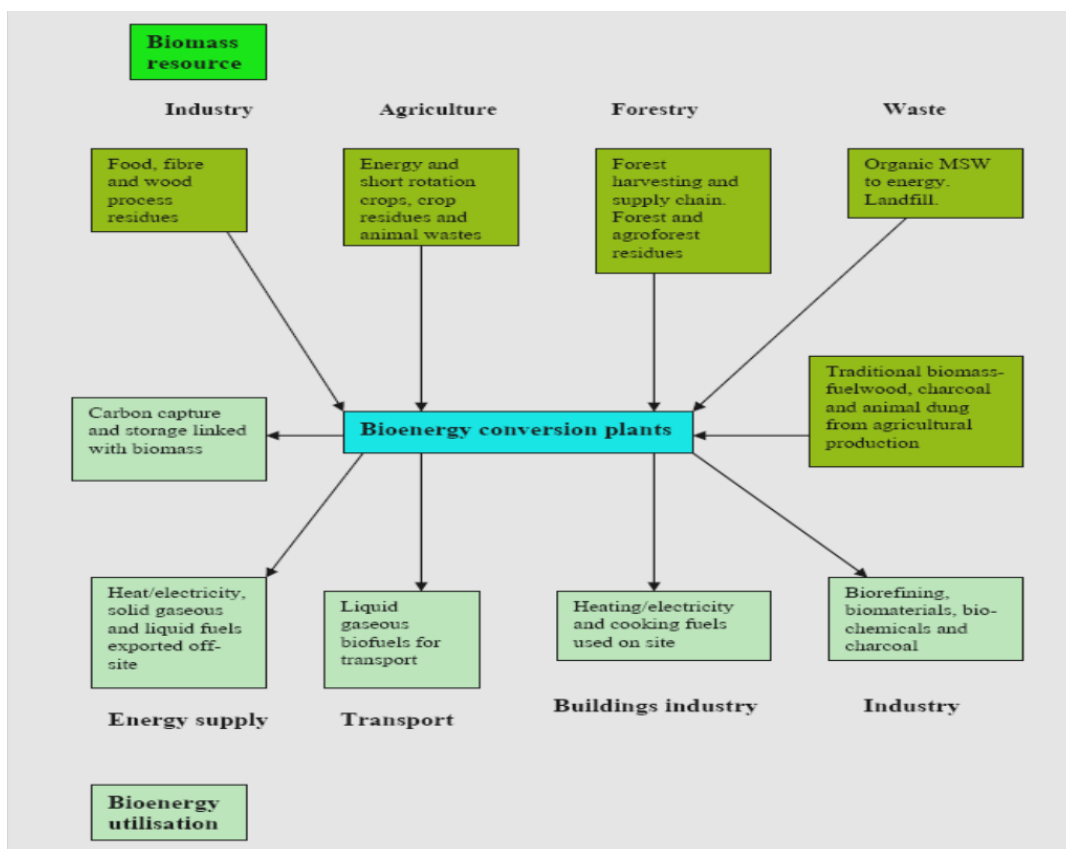


Fig. 4. Biomass resources from several sources are converted into a range of products for use by transport, industry and building sectors (Sims, 2007).

**Table 12**  
Biomass residues and current use (Omer, 2007).

Type of residue	Current use
Wood industry waste	Residues available
Vegetable crop residues	Animal feed
Food processing residue	Energy needs
Sorghum, millet, wheat residues	Fodder, and building materials
Groundnut shells	Fodder, brick making, direct fining oil mills
Cotton stalks	Domestic fuel considerable amounts available for short period
Sugar, bagasse, molasses	Fodder, energy need, ethanol production (surplus available)
Manure	Fertiliser, brick making, plastering

Sewage sludge is rich in nutrients such as nitrogen and phosphorous. It also contains valuable organic matter, useful for remediation of depleted or eroded soils. This is why untreated sludge has been used for many years as a soil fertiliser and for enhancing the organic matter of soil. A key concern is that treatment of sludge tends to concentrate heavy metals, poorly biodegradable trace organic compounds and potentially pathogenic organisms (viruses, bacteria and the like) present in wastewaters. These materials can pose a serious threat to the environment. When deposited in soils, heavy metals are passed through the food chain, first entering crops, and

then animals that feed on the crops and eventually human beings, to whom they appear to be highly toxic. In addition they also leach from soils, getting into groundwater and further spreading contamination in an uncontrolled manner (Levine, and Hirose, 2005).


European and American markets aiming to transform various organic wastes (animal farm wastes, industrial and municipal wastes) into two main by-products:

- A solution of humic substances (a liquid oxidate).
- A solid residue.

Agricultural wastes are abundantly available globally and can be converted to energy and useful chemicals by a number of microorganisms. The organic matter was biodegradable to produce biogas and the variation show a normal methanogenic bacteria activity and good working biological process as shown in Figures 5-7. The success of promoting any technology depends on careful planning, management, implementation, training and monitoring. Main features of gasification project are:

- Networking and institutional development/strengthening.
- Promotion and extension.
- Construction of demonstration projects.
- Research and development, and training and monitoring.

Biomass is a raw material that has been utilised for a wide variety of tasks since the dawn of civilisation. Important as a supply of fuel in the third world, biomass was also the first raw material in the production of textiles. The gasification of the carbon char with steam can make a large difference to the surface area of the carbon. The corresponding steam gasification reactions are endothermic and demonstrate how the steam reacts with the carbon char (Bacaoui, 1998).



**Table 13**  
Comparison of various fuels (Omer, 2003).

Fuel	Calorific value (kcal)	Burning mode	Thermal efficiency (%)
Electricity, kWh	880	Hot plate	70
Coal gas, kg	4004	Standard burner	60
Biogas, m3	5373	Standard burner	60
Kerosene, l	9122	Pressure stove	50
Charcoal, kg	6930	Open stove	28
Soft coke, kg	6292	Open stove	28
Firewood, kg	3821	Open stove	17
Cow dung, kg	2092	Open stove	11

The sources to alleviate the energy situation in the world are sufficient to supply all foreseeable needs. Conservation of energy and rationing in some form will however have to be practised by most countries, to reduce oil imports and redress balance of payments positions. Meanwhile development and application of nuclear power and some of the traditional solar, wind and water energy alternatives must be set in hand to supplement what remains of the fossil fuels.

The encouragement of greater energy use is an essential component of development. In the short term it requires mechanisms to enable the rapid increase in energy/capita, and in the long term we should be working towards a way of life, which makes use of energy efficiency and without the impairment of the environment or of causing safety problems. Such a programme should as far as possible be based on renewable energy resources.



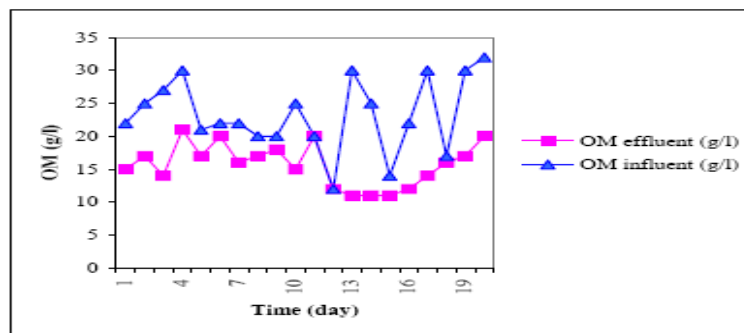


Fig. 5. Organic matters before and after treatment in digester (Omer, 2006).

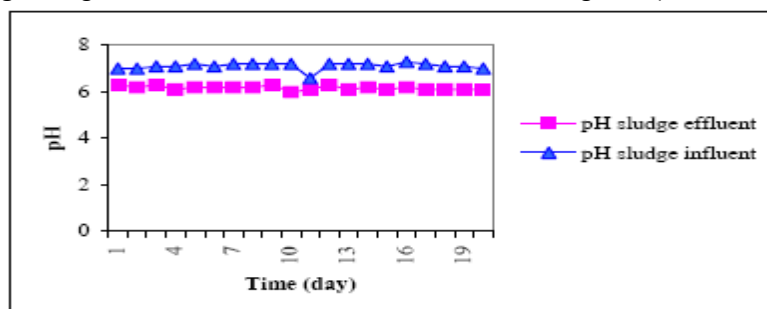


Fig. 6. pH sludge before and after treatment in the digester (Omer, 2006).

### 3.5. Bioheat

Bioenergy is a growing source of power that is playing an ever-increasing role in the provision of electricity. The potential contribution of the waste industry to bioenergy is huge and has the ability to account for a source of large amount of total bioenergy production. Woody biomass is usually converted into power through combustion or gasification. Biomass can be specially grown in the case of energy crops.

**Table 14**

Biomass conversions to energy (Omer, 2006).

Feedstock	Crops	Conversion process	End product
Wood-cellulosic biomass	Short rotation forest (poplar, willow), plant species (sorghum, miscanthus, etc.), fibre-crops (cynara, kenaf, etc.)	Direct combustion	Heat
		Gasification	Methane
		Pyrolysis	Hydrogen Oil
Vegetable oils	Oleaginous crops (rapeseed, soybean, sunflower, etc.)	Direct combustion	Heat
		Esterification	Biodiesel
Sugar/starch	Cereals, root and tuber crops, grape, topinambour, etc.	Fermentation	Ethanol

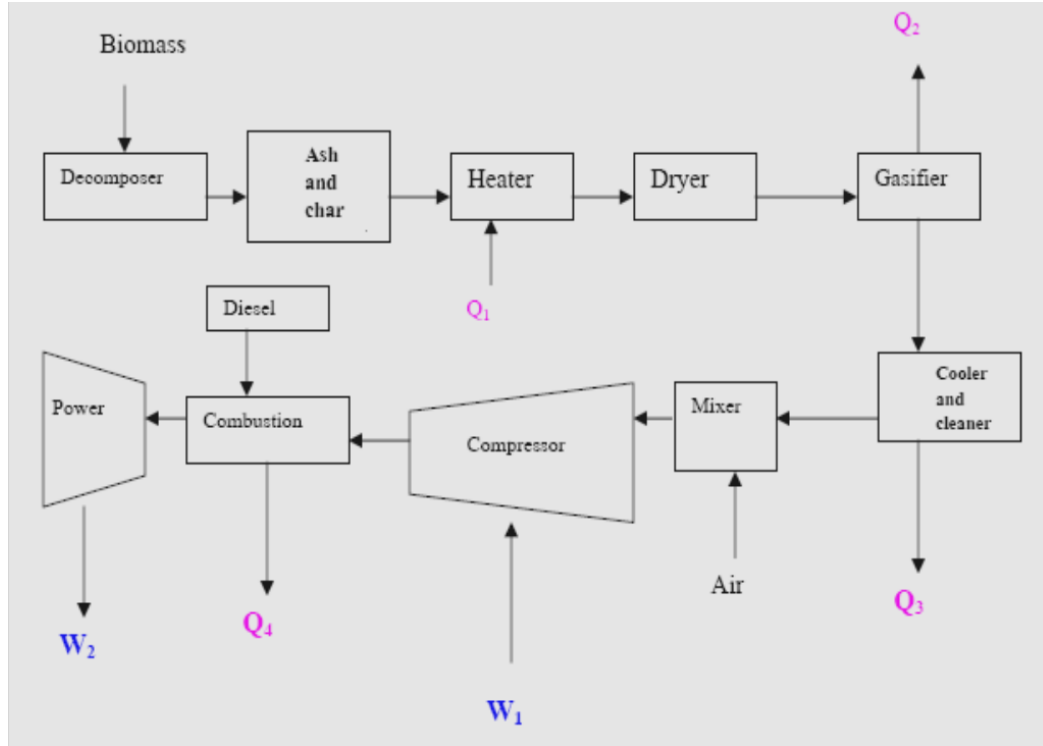


Fig. 7. Advanced biomass power with diesel engine (Omer, 2006).

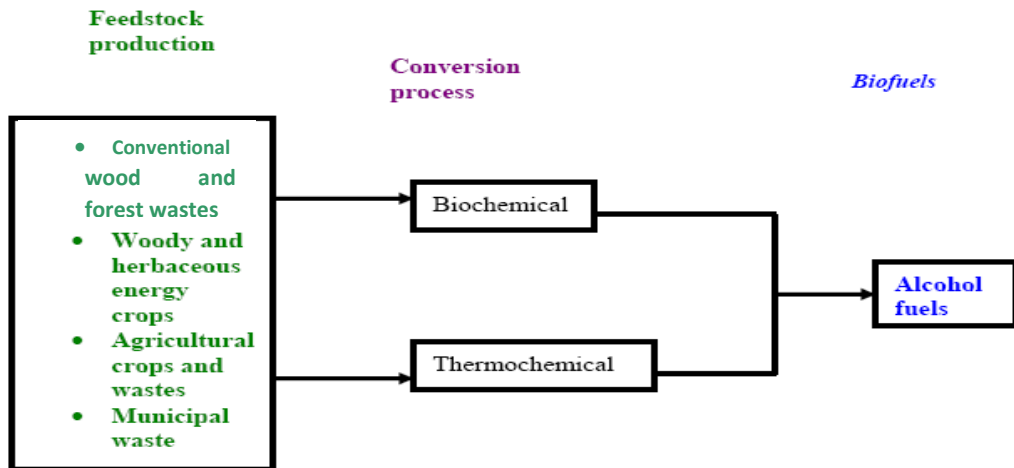


Fig. 8. Biofuel pathways for renewable alcohol fuels (Omer, 2006).

Waste wood makes up a significant proportion of a variety of municipal, commercial and industrial waste streams. It is common practice to dispose of this waste wood in landfill where it slowly degraded and takes up valuable void space. This wood is a good source of energy and is an alternative to energy crops. The biomass directly produced by cultivation can be transformed by different processes into gaseous, liquid or solid fuels (Table 14). The whole process of production of methyl or ethyl esters (biodiesel) is summarised in Figures 8-9. Guilherme, Luiz, and Legey (2013) investigated energy from sugarcane bagasse in Brazil: An assessment of the productivity and cost of different technological routes.

### 3.5.1. Waste policy in context

In terms of solid waste management policy, many NGOs have changed drastically in the past ten years from a mass production and mass consumption society to 'material-cycle society'. In addition to national legislation,

municipalities are legally obliged to develop a plan for handling the municipal solid waste (MSW) generated in administrative areas. Such plans contain:

- Estimates of future waste volume.
- Measures to reduce waste.
- Measures to encourage source separation.
- A framework for solid waste disposal and the construction and management of solid waste management facilities.

Landfilling is in the least referred tier of the hierarchy of waste management options: Waste minimisation, reuse and recycling, incineration with energy recovery, and optimised final disposal. The key elements are as follows: construction impacts, atmospheric emissions, noise, water quality, landscape, visual impacts, socio economics, ecological impacts, traffic, solid waste disposal and cultural heritage (Barton, 2007).

### 3.5.2. Energy from agricultural biomass

The main advantages are related to energy, agriculture and environment problems, are foreseeable both at regional level and at worldwide level and can be summarised as follows:

- Reduction of dependence on import of energy and related products.
- 

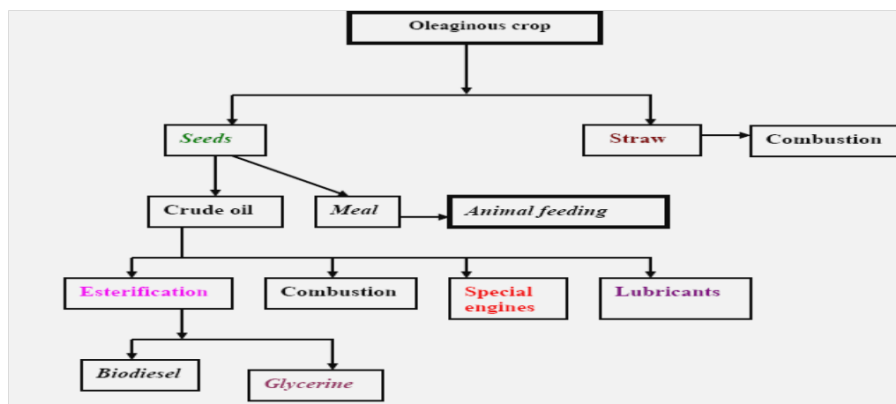


Fig. 9. Flow chart of biodiesel production (Omer, 2006).

- Reduction of environmental impact of energy production (greenhouse effect, air pollution, waste degradation).
- Substitution of food crops and reduction of food surpluses and of related economic burdens.
- Utilisation of marginal lands and of set aside lands and reduction of related socio-economic and environmental problems (soil erosion, urbanisation, landscape deterioration, etc.).
- Development of new know-how and production of technological innovation.

A study (Bacaoui, 1998) individuated on the basis of botanical, genetical, physiological, biochemical, agronomical and technological knowledge reported in literature some 150 species potentially exploitable divided as reported in Table 15.

### 3.6. Role of chemical engineering

Turning to chemical engineering and the experience of the chemical process industry represents a wakening up but does not lead to an immediate solution to the problems. The traditional techniques are not very kind to biological products, which are controlled by difficulty and unique physico-chemical properties such as low mechanical, thermal and chemical stabilities. There is the question of selectivity. The fermentation broths resulting from microbial growth contain a bewildering mixture of many compounds closely related to the product of interests. By the standards of the process streams in chemical industry, fermenter is highly impure and extremely dilutes aqueous systems (Table 16).

**Table 15**

Plant species potentially exploitable for production of agricultural biomass for energy or industrial utilisations (Rossi et al, 1990)

<b>Groups of plants</b>	<b>Number of species</b>
Plants cultivated for food purposes that can be reconverted to new uses	9
Plants cultivated in the past, but not in culture any more	46
Plants cultivated in other world areas	46
Wild species, both indigenous and exotic	47
<b>Total</b>	<b>148</b>
<b>Plant product</b>	<b>Number of species</b>
Biomass	8
Sugars and polysaccharides	38
Cellulose	17
Hydrocarbons	3
Polymeric hydrocarbons	5
Gums and resins	12
Tannins and phenolic compounds	3
Waxes	7
Vegetable oils	38
<b>Total</b>	<b>131</b>

The disadvantages of the fermentation media are as the following: mechanically fragile, temperature sensitive, rapidly deteriorating quality, harmful if escaping into the environment, corrosive (acids, chlorides, etc.), and troublesome (solids, theological, etc.), and expensive. Thus, pilot plants for scale-up work must be flexible. In general, they should contain suitably interconnected equipment for: fermentation, primary separation, cell disruption fractionalises and clarifications, purification by means of high-resolution techniques and concentration and dry. The effects of the chlorofluorocarbons (CFCs) molecule can last for over a century.

**Table 16**

Typical product concentrations exiting fermenters (Rossi et al, 1990).

<b>Product</b>	<b>Concentration (kg/m3)</b>
Ethanol	70-120
Organic acids (e.g., citric)	40-100
Vitamin B12	0.02
Interferon	50-70
Single-cell protein	30-50
Antibiotics (e.g., Penicillin G)	10-30
Enzyme protein (e.g., protease)	2-5

### 3.6.1. Fluidised bed drying

An important consideration for operators of wastewater treatment plants is how to handle the disposal of the residual sludge in a reliable, sustainable, legal and economical way. The benefits of drying sludge can be seen in two main treatment options:

- Use of the dewatered sludge as a fertiliser or in fertiliser blends.
- Incineration with energy recovery.

Use as a fertiliser takes advantage of the high organic content 40%-70% of the dewatered sludge and its high levels of phosphorous and other nutrients. However, there are a number of concerns about this route including:

- The chemical composition of the sludge (e.g., heavy metals, hormones and other pharmaceutical residues).
- Pathogen risk (e.g., SALMOELLA, ESCHERICHIA COLI, prionic proteins, etc.).
- Potential accumulation of heavy metals and other chemicals in the soil.

Sludge can be applied as a fertiliser in three forms: liquid sludge, wet cake blended into compost, and dried granules.

The advantages of energy recovery sludge include:

- The use of dewatered sludge is a 'sink' for pollutants such as heavy metals, toxic organic compounds and pharmaceutical residues. Thus, offering a potential disposal route for these substances provided the combustion plant has adequate flue gas cleaning.
- The potential, under certain circumstances, to utilise the inorganic residue from sludge incineration (incinerator ash), such as in cement or gravel.
- The high calorific value (similar to lignite) of dewatered sludge.
- The use of dewatered sludge as a carbon dioxide neutral substitute for primary fuels such as oil, gas and coal.

### **3.6.2. Energy efficiency**

Energy efficiency is the most cost-effective way of cutting carbon dioxide emissions and improvements to households and businesses. It can also have many other additional social, economic and health benefits, such as warmer and healthier homes, lower fuel bills and company running costs and, indirectly, jobs. Britain wastes 20 per cent of its fossil fuel and electricity use in transportation. This implies that it would be cost-effective to cut £10 billion a year off the collective fuel bill and reduce CO<sub>2</sub> emissions by some 120 million tons CO<sub>2</sub>. Yet, due to lack of good information and advice on energy saving, along with the capital to finance energy efficiency improvements, this huge potential for reducing energy demand is not being realised. Traditionally, energy utilities have been essentially fuel providers and the industry has pursued profits from increased volume of sales. Institutional and market arrangements have favoured energy consumption rather than conservation. However, energy is at the centre of the sustainable development paradigm as few activities affect the environment as much as the continually increasing use of energy. Most of the used energy depends on finite resources, such as coal, oil, gas and uranium. In addition, more than three quarters of the world's consumption of these fuels is used, often inefficiently, by only one quarter of the world's population. Without even addressing these inequities or the precious, finite nature of these resources, the scale of environmental damage will force the reduction of the usage of these fuels long before they run out.

Throughout the energy generation process there are impacts on the environment on local, national and international levels, from opencast mining and oil exploration to emissions of the potent greenhouse gas carbon dioxide in ever increasing concentration. Recently, the world's leading climate scientists reached an agreement that human activities, such as burning fossil fuels for energy and transport, are causing the world's temperature to rise. The Intergovernmental Panel on Climate Change has concluded that "the balance of evidence suggests a discernible human influence on global climate". It predicts a rate of warming greater than any one seen in the last 10,000 years, in other words, throughout human history. The exact impact of climate change is difficult to predict and will vary regionally. It could, however, include sea level rise, disrupted agriculture and food supplies and the possibility of more freak weather events such as hurricanes and droughts. Indeed, people already are waking up to the financial and social, as well as the environmental, risks of unsustainable energy generation methods that represent the costs of the impacts of climate change, acid rain and oil spills. The insurance industry, for example, concerned about the billion dollar costs of hurricanes and floods, has joined sides with environmentalists to lobby for greenhouse gas emissions reduction. Friends of the earth are campaigning for a more sustainable energy policy, guided by the principal of environmental protection and with the objectives of sound natural resource management and long-term energy security. The key priorities of such an energy policy must be to reduce fossil fuel use, move away from nuclear power, improve the efficiency with which energy is used and increase the amount of energy obtainable from sustainable, renewable sources. Efficient energy use has never been more crucial than it is today, particularly with the prospect of the imminent introduction of the climate change levy (CCL). Establishing an energy use action plan is the essential foundation to the elimination of energy waste. A logical starting point is to carry out an energy audit that enables the assessment of the energy use and determine

what actions to take. The actions are best categorised by splitting measures into the following three general groups:

(1) High priority/low cost:

These are normally measures, which require minimal investment and can be implemented quickly. The followings are some examples of such measures:

- Good housekeeping, monitoring energy use and targeting waste-fuel practices.
- Adjusting controls to match requirements.
- Improved greenhouse space utilisation.
- Small capital item time switches, thermostats, etc.
- Carrying out minor maintenance and repairs.
- Staff education and training.
- Ensuring that energy is being purchased through the most suitable tariff or contract arrangements.

(2) Medium priority/medium cost:

Measures, which, although involve little or no design, involve greater expenditure and can take longer to implement. Examples of such measures are listed below:

- New or replacement controls.
- Greenhouse component alteration, e.g., insulation, sealing glass joints, etc.
- Alternative equipment components, e.g., energy efficient lamps in light fittings, etc.

(3) Long term/high cost:

These measures require detailed study and design. They can be best represented by the followings:

- Replacing or upgrading of plant and equipment.
- Fundamental redesign of systems, e.g., CHP installations.

This process can often be a complex experience and therefore the most cost-effective approach is to employ an energy specialist to help.

### 3.6.3. Policy recommendations for a sustainable energy future

Sustainability is regarded as a major consideration for both urban and rural development. People have been exploiting the natural resources with no consideration to the effects, both short-term (environmental) and long-term (resources crunch). It is also felt that knowledge and technology have not been used effectively in utilising energy resources. Energy is the vital input for economic and social development of any country. Its sustainability is an important factor to be considered. The urban areas depend, to a large extent, on commercial energy sources. The rural areas use non-commercial sources like firewood and agricultural wastes. With the present day trends for improving the quality of life and sustenance of mankind, environmental issues are considered highly important. In this context, the term energy loss has no significant technical meaning. Instead, the exergy loss has to be considered, as destruction of exergy is possible. Hence, exergy loss minimisation will help in sustainability. In the process of developing, there are two options to manage energy resources: (1) End use matching/demand side management, which focuses on the utilities. The mode of obtaining this is decided based on economic terms. It is, therefore, a quantitative approach. (2) Supply side management, which focuses on the renewable energy resource and methods of utilising it. This is decided based on thermodynamic consideration having the resource-user temperature or exergy destruction as the objective criteria. It is, therefore, a qualitative approach. The two options are explained schematically in Figure 10. The exergy-based energy, developed with supply side perspective is shown in Figure 11.

The following policy measures had been identified:

- Clear environmental and social objectives for energy market liberalisation, including a commitment to energy efficiency and renewables.
- Economic, institutional and regulatory frameworks, which encourage the transition to total energy services.
- Economic measures to encourage utility investment in energy efficiency (e.g., levies on fuel bills).
- Incentives for demand side management, including grants for low-income households, expert advice and training, standards for appliances and buildings and tax incentives.
- Research and development funding for renewable energy technologies not yet commercially viable.

- Continued institutional support for new renewables (such as standard cost-reflective payments and obligation on utilities to buy).
- Ecological tax reform to internalise external environmental and social costs within energy prices.
- Planning for sensitive development and public acceptability for renewable energy.

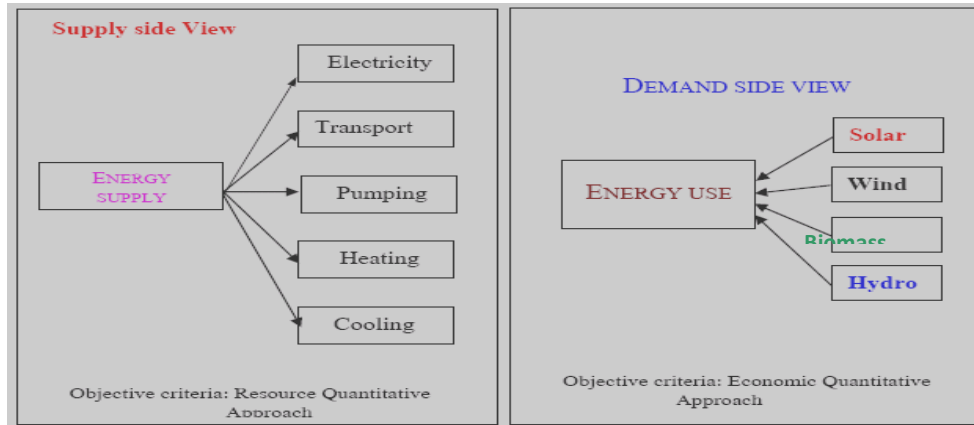


Fig. 10. Supply side and demand side management approach for energy (Omer, 2008).

Energy resources are needed for societal development. Their sustainable development requires a supply of energy resources that are sustainably available at a reasonable cost and can cause no negative societal impacts. Energy resources such as fossil fuels are finite and lack sustainability, while renewable energy sources are sustainable over a relatively longer term. Environmental concerns are also a major factor in sustainable development, as activities, which degrade the environment, are not sustainable. Hence, as much as environmental impact is associated with energy, sustainable development requires the use of energy resources, which cause as little environmental impact as possible. One way to reduce the resource depletion associated with cycling is to reduce the losses that accompany the transfer of exergy to consume resources by increasing the efficiency of exergy transfer between resources, i.e., increasing the fraction of exergy removed from one resource that is transferred to another (Erlich, 1991).

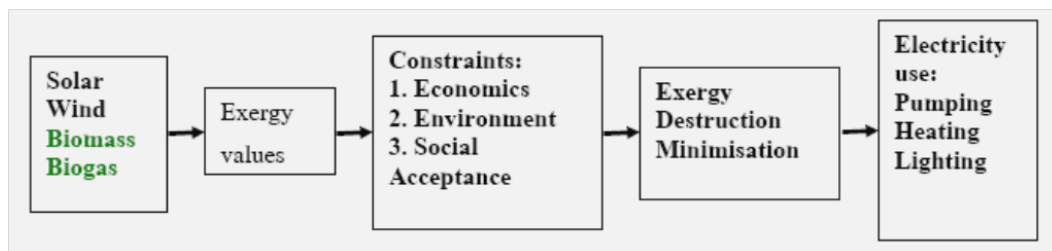


Fig. 11. Exergy based optimal energy model (Omer, 2008).

As explained above, exergy efficiency may be thought of as a more accurate measure of energy efficiency that accounts for quantity and quality aspects of energy flows. Improved exergy efficiency leads to reduced exergy losses. Most efficiency improvements produce direct environmental benefits in two ways. First, operating energy input requirements are reduced per unit output, and pollutants generated are correspondingly reduced. Second, consideration of the entire life cycle for energy resources and technologies suggests that improved efficiency reduces environmental impact during most stages of the life cycle. Quite often, the main concept of sustainability, which often inspires local and national authorities to incorporate environmental consideration into setting up energy programmes have different meanings in different contexts though it usually embodies a long-term perspective. Future energy systems will largely be shaped by broad and powerful trends that have their roots in basic human needs. Combined with increasing world population, the need will become more apparent for successful implementation of sustainable development (Aroyeun, 2009).

Heat has a lower exergy, or quality of energy, compared with work. Therefore, heat cannot be converted into work by 100% efficiency. Some examples of the difference between energy and exergy are shown in Table 17.

$$\text{Carnot Quality Factor (CQF)} = (1 - T_o / T_s) \tag{5}$$

$$\text{Exergy} = \text{Energy (transferred)} \times \text{CQF} \tag{6}$$

Where  $T_o$  is the environment temperature (K) and  $T_s$  is the temperature of the stream (K).

**Table 17**  
Qualities of various energy sources (Omer, 2008).

Source	Energy (J)	Exergy (J)	CQF
Water at 80oC	100	16	0.16
Steam at 120oC	100	24	0.24
Natural gas	100	99	0.99
Electricity/work	100	100	1.00

The terms used in Table 17 have the following meanings:

Various parameters are essential to achieving sustainable development in a society. Some of them are as follows:

- Public awareness.
- Information.
- Environmental education and training.
- Innovative energy strategies.
- Renewable energy sources and cleaner technologies.
- Financing.
- Monitoring and evaluation tools.

Improving access for rural and urban low-income areas in developing countries must be through energy efficiency and renewable energies. Sustainable energy is a prerequisite for development. Energy-based living standards in developing countries, however, are clearly below standards in developed countries. Low levels of access to affordable and environmentally sound energy in both rural and urban low-income areas are therefore a predominant issue in developing countries. In recent years many programmes for development aid or technical assistance have been focusing on improving access to sustainable energy, many of them with impressive results (Omer, 2006).

Apart from success stories, however, experience also shows that positive appraisals of many projects evaporate after completion and vanishing of the implementation expert team. Altogether, the diffusion of sustainable technologies such as energy efficiency and renewable energies for cooking, heating, lighting, electrical appliances and building insulation in developing countries has been slow. Energy efficiency and renewable energy programmes could be more sustainable and pilot studies more effective and pulse releasing if the entire policy and implementation process was considered and redesigned from the outset. New financing and implementation processes are needed which allow reallocating financial resources and thus enabling countries themselves to achieve a sustainable energy infrastructure (Cihan, Dursun, Bora, and Erkan 2009). The links between the energy policy framework, financing and implementation of renewable energy and energy efficiency projects have to be strengthened and capacity building efforts are required.

#### 4. Conclusions

Even with modest assumptions about the availability of land, comprehensive fuel-wood farming programmes offer significant energy, economic and environmental benefits. These benefits would be dispersed in rural areas where they are greatly needed and can serve as linkages for further rural economic development. The nations, as a whole would benefit from savings in foreign exchange, improved energy security, and socio-economic improvements. With a nine-fold increase in forest – plantation cover, the nation’s resource base would be greatly improved. The international community would benefit from pollution reduction, climate mitigation, and the increased trading opportunities that arise from new income sources. Furthermore, investigating the potential to make use of more and more of its waste is needed. Household waste, vegetable market waste, and waste from the cotton stalks, leather, and pulp; and paper industries can be used to produce useful energy either by direct



incineration, gasification, digestion (biogas production), fermentation, or cogeneration. Therefore, effort has to be made to reduce fossil energy use and to promote green energies, particularly in the building sector. Energy use reductions can be achieved by minimising the energy demand, by rational energy use, by recovering heat and the use of more green energies. This study was a step towards achieving that goal. The adoption of green or sustainable approaches to the way in which society is run is seen as an important strategy in finding a solution to the energy problem. The key factors to reducing and controlling CO<sub>2</sub>, which is the major contributor to global warming, are the use of alternative approaches to energy generation and the exploration of how these alternatives are used today and may be used in the future as green energy sources. Even with modest assumptions about the availability of land, comprehensive fuel-wood farming programmes offer significant energy, economic and environmental benefits. These benefits would be dispersed in rural areas where they are greatly needed and can serve as linkages for further rural economic development. The nations as a whole would benefit from savings in foreign exchange, improved energy security, and socio-economic improvements. With a nine-fold increase in forest – plantation cover, a nation's resource base would be greatly improved. The international community would benefit from pollution reduction, climate mitigation, and the increased trading opportunities that arise from new income sources.

## References

- Abdeen, M.O., 2008a. Renewable building energy systems and passive human comfort solutions. *Renew. Susta. Ener. Rev.*, 12(6), 1562-1587.
- Abdeen, M.O., 2008b. People, power and pollution. *Renew. Susta. Ener. Rev.*, 12(7), 1864-1889.
- Abdeen, M.O., 2008c. Energy, environment and sustainable development. *Renew. Susta. Ener. Rev.*, 12(9), 2265-2300.
- Abdeen, M.O., 2008d. Focus on low carbon technologies: The positive solution. *Renew. Susta. Ener. Rev.*, 12(9), 2331-2357.
- Abdeen, M.O., 2008e. Chapter 10: Development of integrated bioenergy for improvement of quality of life of poor people in developing countries. In F. L. Magnusson & O. W. Bengtsson (Eds.), *Energy in Europe: Econom., policy and strategy* (pp. 341-373). New York, NY: NOVA Sci. Publ.
- Abdeen, M.O., 2009a. Environmental and socio-economic aspect of possible development in renewable energy use. In *Proceedings of the 4th Internat. Sympos. Env.*, Athens, Greece, 21-24 May 2009.
- Abdeen, M.O., 2009b. Energy use, environment and sustainable development. *Proceed. 3rd Internat. Confer. Susta. Ener. Env. Protect.*, (SEEP 2009), Paper No.1011, Dublin, Republic of Ireland, 12-15 August 2009.
- Abdeen, M.O., 2009c. Energy use and environmental: Impacts: A general review. *J. Renew. Susta. Ener.*, 1(5), 1-29.
- Abdeen, M.O., 2009d. Chapter 3: Energy use, environment and sustainable development. In R. T. Mancuso (Ed.), *Env. manag.*, (pp. 129-166). New York, NY: NOVA Sci. Publ.
- Ahmed, A., 2004. Making technology work for poor: strategies and policies for African sustainable development. *Internat. J. Technol. Policy Manag.*, 4(1), 1-17. 2004.
- Aroyeun, S.O., 2009. Reduction of aflatoxin B1 and Ochratoxin A in cocoa beans infected with *Aspergillus* via Ergosterol Value. *World Rev. Sci. Technol. Susta. Dev.*, 6(1), 75-90.
- Bacaoui, A., Yaacoubi, A., Dahbi, C., Bennouna, J., Mazet, A., 1998. Activated carbon production from Moroccan olive wastes-influence of some factors. *Env. Technol.*, 19, 1203-1212.
- Barton, A.L., 2007. Focus on sustainable development research advances, (pp. 189-205). New York, NY. NOVA Sci. Publ., Inc.
- Brain, G., Mark, S., 2007. Garbage in, energy out: Landfill gas opportunities for CHP projects. *Cogeneration and On-Site Power.*, 8(5), 37-45.
- Cihan, G., Dursun, B., Bora, A., Erkan, S., 2009. Importance of biomass energy as alternative to other sources in Turkey. *Ener. Policy* 37 (2) (2009) 424-431.
- D'Apote, S.L., 1998. IEA biomass energy analysis and projections. In: *Proceedings of Biomass Energy Conference: Data, analysis and Trends*, Paris: OECD; 23-24 March 1998.
- Erllich, P., 1991. Forward facing up to climate change, in *Global Climate Change and Life on Earth*. R.C. Wyman (Ed), Chapman and Hall, London.
- Guilherme, A.D., Luiz, F.L., Legey, A.M., 2013. Energy from sugarcane bagasse in Brazil: An assessment of the productivity and cost of different technological routes. *Renew. Susta. Ener. Rev.*, 21: 356–364.

- Hall, O., Scrase, J., 1998. Will biomass be the environmentally friendly fuel of the future. *Biom. Bioener.*, 15, 357-67.
- IEA., 2008. Combined heat and power: evaluating the benefits of greater global investment.
- Jeremy, L., 2005. The energy crisis, global warming and the role of renewables. *Renew. Ener. World.*, 8(2).
- Levine, M., Hirose, M., 2005. Energy efficiency improvement utilising high technology: An assessment of energy use in industry and buildings. Report and Case Studies. London, UK: World Ener. Council.
- Omer, A.M., Yemen, F., 2003. Biogas energy technology in Sudan. *Renew. Ener.*, 28 (3), 499-507.
- Omer, A.M., 2006. Review: Organic waste treatment for power production and energy supply. *Cells Anim. Biol.*, 1 (2), 34-47.
- Omer, A.M., 2008. Green energies and environment. *Renew. Susta. Ener. Rev.*, 12, 1789-1821.
- Omer, A.M., 2007. Renewable energy resources for electricity generation in Sudan. *Renew. Susta. Ener. Rev.*, 11, 1481-1497.
- Pernille, M., 2004. Feature: Danish lessons on district heating. *Ener. Res. Susta. Manag. Env.*, March/April 2004, 16-17.
- Rasslavicius, L., Grzybek, A., Dubrovin, V., 2011. Bioenergy in Ukraine - possibilities of rural development and opportunities for local communities. *J. Ener. Policy.*, 2011 39 (6), 3370-3379.
- Robinson, G., 2007. Changes in construction waste management. *Waste Management World* p. 43-49. May-June 2007.
- Rossi, S., Arnone, S., Lai, A., Lapenta, E., Sonnino, A., 1990. ENEA's activities for developing new crops for energy and industry. In: Biomass for Energy and Industry (G. Grassi, G. Gosse, G. dos Santos Eds.). Vol.1, p.107-113. Elsev. Appl.Sci., London and New York.
- Sims, R.H., 2007. Not too late: IPCC identifies renewable energy as a key measure to limit climate change. *Renew. Ener. World.*, 10 (4), 31-39.
- Wu, J., Boggess, W., 1999. The optimal allocation of conservation funds. *J. Env. Econom. Manag.*, 1999, 38.

### **Other readings**

#### **Climate change**

- Consequences of Country's Withdrawal from Climate Change Agreements: Implications for Carbon Emissions Reduction (The) / K. O. Odeku; A. Maveneka & R. H. Konanani. *Journal of Human Ecology* 41(1), 2013.
- Energy and Climate Change: Critical reflection on the African Continent / A. T. Raphael. *Journal of Sustainable Development in Africa* 14(6), 2012.
- Is There an Ideal REDD+ Program? An Analysis of Policy Trade-Offs at the Local Level / G. A. Dyer; R. Matthews & P. Meyfroidt. *PLoS ONE* 7(12) 2012.
- New Levels of Climate Adaptation Policy: Analyzing the Institutional Interplay in the Baltic Sea Region / E. Glaas; S. Juhola. *Sustainability* 5, 2013.

#### **Communication and environment**

- Attitude and Knowledge of Print Media Journalists towards Reporting of Climate Change News in Nigeria / C. J. Amu & A. E. Agwu. *Journal of Agricultural Extension* 16 (2), 2012.
- Perceptions Held by Finnish Energy Sector Experts Regarding Public Attitudes to Energy Issues/N. Valkila & A. Saari. *Journal of Sustainable Development* 5(11), 2012.
- Press Coverage of Climate Change Issues in Nigeria and Implications for Public Participation Opportunities / H. E. Batta ; A. C. Ashong & A. S. Bashir. *Journal of Sustainable Development* 6(2), 2013.
- Why we disagree about climate change: a different viewpoint / Gerald Stanhill. *Energy & Environment* 23(8) 2012.

#### **Disasters and conflicts**

- Challenging disparities in capacity development for disaster risk reduction / M. Hagelsteen & P. Becker. *International Journal of Disaster Risk Reduction* 3, 2012.
- Everyday crises: Marginal society livelihood vulnerability and adaptability to hazards / K. Lin; T. C. Chang. *Progress in Development Studies* 13(1), 2013.
- From knowledge to action: Bridging gaps in disaster risk reduction / J.C. Gaillard; J. Mercer. *Progress in Human Geography* 37(1), 2012.
- Parallel structures for disaster risk reduction and climate change adaptation in Southern Africa / P. Becker; M. Abrahamsson & M. Hagelsteen. *Journal of Disaster Risk Studies* 5(2), 2013.

### **Ecosystem Management**

- Characterization of the Water Quality Status on a Stretch of River Lézé around a Small Hydroelectric Power Station / E. Valero. *Water* 4, 2012.
- Combining Ecosystem Service and Critical Load Concepts for Resource Management and Public Policy / T. J. Sullivan. *Water* 4, 2012.
- Ethical Considerations in On-Ground Applications of the Ecosystem Services Concept / G. W. Luck. *Bioscience* 62(12), 2012.
- 

### **Environmental governance**

- 
- Aligning Regulation with the Informational Need: Ecosystem Services and the Next Generation of Environmental Law / K. H. Hirokawa & E. J. Porter. *Akron Law Review* 17, 2013.
- 'Donor-driven' neoliberal reform processes and urban environmental change in Kenya: The case of Karura Forest in Nairobi / J. Njeru. *Progress in Development Studies* 13(1), 2013.
- Managers' Views on Environmental Management: An Examination of the Taiwanese Airline Industry / F. Chen. *Journal of Sustainable Development* 6(1), 2013.

### **Green economy**

- Exploration of Green Computing / N. Kaur. *International Journal of Emerging Technology and Advanced Engineering* 3(1), 2013.
- Investments and public finance in a green, low carbon, economy / C. Carraro; A. Favero & E. Massetti. *Energy Economics* 34 (2012).
- Rio+20, the Green Economy and Re-orienting Sustainable Development / K. Morrow. *Environmental Law Review* 14(4), 2012
- Towards sustainable green ship technology / O. Sulaiman; A. H. Saharuddin & A. S. A. Kader. *African Journal of Business Management* Vol. 7(2), 2013.
- 

### **Harmful substance**

- Automated solid waste bin level detection system using Gabor wavelet filters and multi-layer perception (An) / M. A. Hannana et al. *Resources, Conservation and Recycling* 72, 2013.
- Emerging EPA Regulation of Pharmaceuticals in the Environment / G. Eckstein. *Environmental Law Institute* 12, 2012.
- Environmental pollution and ozone depletion; challenges to the school health educators / P.O. Akinbile; A. E. Bernard & J. O. Adelus. *Journal of Science and Science Education, Ondo* Vol. 3(1), 2012.
- Maturity tests during the composting of municipal solid wastes (The) / O. Fourti. *Resources, Conservation and Recycling* 72, 2013.

### **Housing and slum upgrading**

- Comparing urban sanitation and solid waste management in East African metropolises : The role of civil society organizations / J. T. Tukahirwa et al. *Cities* 30, 2013.
- Does housing drive state-level job growth? Building permits and consumer expectations forecast a state's economic activity / J. Strauss. *Journal of Urban economics* 73, 2013.
- Effectiveness of economic incentives for sustaining community based natural resource management (The) / H. Suich. *Land Use Policy* 31, 2013.
- Indicator scarcity on cadastre and land registration in cross-country information sources / K. Haldrub; E. Stubkiaer. *Land Use Policy* 30, 2013.

### **Research and capacity development**

- Advancing sustainable development at the local level: The case of machizukuri in Japanese cities / E. Kusakabe. *Progress in Planning* 80, 2013.
- Impact of the Madrid subway on population settlement and land use / F. Calvo et al. *Land Use Policy* 31, 2013.
- Modeling urban evolution using neural networks, fuzzy logic and GIS : The case of the Athens metropolitan area / G. Grekousis et al. *Cities* 30, 2013.
- Using carrying capacity as a base line for building sustainability assessment / M. Bendewald; Z. J. Zhai. *Habitat International* 37, 2013.

### **Resources efficiency**

- Applying exergy analysis to rainwater harvesting systems to assess resource efficiency / M. V. Vargas-Parra et al. *Resources, Conservation and Recycling* 72, 2013.
- Clean and green energy technologies: Sustainable development and environment / A. M. Omer. *Sky Journal of Agricultural Research* Vol. 1(2), pp. 28 - 50, December, 2012.
- Eco-efficiency: Trends, Goals and their implementation in Luthania / R. Dagiliūtė et al. *Journal of Environmental Engineering and Landscape Management* 20(4), 2012.
- Development of a Green Floating Breakwater with Re-use of PET Bottles / L. K. K. Vieira & T. Z. Gireli. *Journal of Sustainable Development* 5(12), 2012.

### **Risk reduction and rehabilitation**

- 
- Food Security, Gender, and Occupational Choice among Urban Low-Income Households / M. S. Floro. *World Development* 42, 2013.
- Land, power and peace : Tenure formalization, agricultural reform, and livelihood insecurity in rural Rwanda / M. F. Pritchard. *Land Use Policy* 30, 2013.
- Mainstreaming disaster resilience attributes in local development plans for the adaptation to climate change induced flooding: A case study based on the local plan of Shah Alam City, Malaysia / D. K. Khailani; R. Perera. *Land Use Policy* 30, 2013.
- On recognizing land administration as critical, public good infrastructure / R. Bennet et al. *Land Use Policy* 30, 2013.

### **urban basic services**

- Does the Chinese market for urban land use rights meet good governance principles? / N. H. Koroso et al. *Land Use Policy* 30, 2013.
- Geographic clustering and productivity: An instrumental variable approach for classical composers / K. J. Borowiecki. *Journal of Urban economics* 73, 2013.

- Myth of 'healthy' competition in the water sector : The case of small scale water providers (The) / R. Ahlers et al. *Habitat International* 38, 2013.
- Redressing Grievances and Complaints Regarding Basic Service Delivery / V. Gauri. *World Development* 41, 2013.

#### **Urban economy**

- Becoming homeowners : The emergence and use of online neighborhood forums in transitional urban China / L. Li ; S. Li. *Habitat International* 38, 2013.
- Efficiency and spatial equity impacts of high-speed rail extensions in urban areas / A. Monzon et al. *Cities* 30, 2013.
- Land allocation: Agriculture vs. urban development in Israel / Y. Ga; E. Hadas. *Land Use Policy* 31, 2013
- Language and urban labor market segmentation : Theory and evidence / Q. Li. *Journal of Urban economics* 74, 2013.

#### **Urban land, legislation and governance**

- Adapting governance for coastal change in Portugal / L. Schmidt et al. *Land Use Policy* 31, 2013.
- Conservation success over time: Evaluating the land use and cover change in a protected area under a long re-categorization process (The) / A. C. L. M. Payes et al. *Land Use Policy* 30, 2013.
- Death of a planning department: Challenges for regionalism in a weak mandate state / C. G. Loh; N. Sami. *Land Use Policy* 32, 2013.
- Land administration for food security : A research synthesis / G. Rockson et al. *Land Use Policy* 32, 2013.

#### **Urban planning and design**

- Cities special section on "Analysis and Planning of Urban Settlements : The Role of Accessibility" / G. D. Montis et al. *Cities* 30, 2013.
- Measuring urban sprawl and its drivers in large Chinese cities: The case of Hangzhou / W. Yuea; Y. Liu & P. Fan. *Land Use Policy* 31, 2013.
- Towards a social-ecological resilience framework for coastal planning / M. G. Lloyd et al. *Land Use Policy* 30, 2013.

Transformation of a Mediterranean port city into a 'city of clutter': Dualities in the urban landscape – The case of Mersin / T. Unlu. *Cities* 30, 2013.