

Contents lists available at Sjournals

Scientific Journal of  
**Pure and Applied Sciences**

Journal homepage: [www.Sjournals.com](http://www.Sjournals.com)



**Original article**

## **Implementation a method to provide quality in manet and survey the effect of that at decreasing Data Dropped of DSR and AODV routing protocols**

**A.A. Arjomand Hashjin**

*Department Of Computer Engineering, Islamic Azad University Of Zanjan, Iran.*

\*Corresponding author; Department Of Computer Engineering, Islamic Azad University Of Zanjan, Iran.

### ARTICLE INFO

*Article history,*

Received 07 December 2014

Accepted 19 January 2015

Available online 29 January 2015

*Keywords,*

Routing protocols

Route discover time

AODV

DSR

MANET

RSVP

### ABSTRACT

In Ad-Hoc wireless networks nodes change their situations proximately, that means this situation requires routing protocols that have ability to adaptability with this changes. Providing the QoS in this networks is intolerable, through topology changes and use the joint media by the network nodes. The most routing protocols that designed for this networks, only find the route by the scales of step and don't consider the QoS of created routes. In this cases for providing QoS, we decided to apply one of the methods of providing the QoS that named: resources reserve on the routing protocols. For this reason, in this essay we use two different scenarios in a MANET's example environment, which they have (500\*500)M and (1000\*1000)M dimensions. The scenarios have fifty nodes. The AODV and DSR are usable routing protocols and the work styles of these protocols are like the followings: At first we implement the RSVP protocol on the mentioned routing protocols and we compare the Data Dropped of them when RSVP protocol applied to when protocol have not applied. Scenarios that implemented and evaluated by Opnet 14 simulator and simulation results are fully described. Simulation results show this fact that when we apply RSVP on AODV and DSR routing protocol, Data Dropped is reduced. Also AODV has a better performance.

© 2015 Sjournals. All rights reserved.

## 1. Introduction

MANET's Ad-Hoc mobile networks consists of mobile nodes that form a network temporarily. In MANET a message sent by a node, receive by another node in neighborhood or the node that is in radio radius. Hosts mobility cause frequent changes, which will cause unpredictability in the topology of network. In order to facilitate communication within the network routing, protocols are used to discover the routes between nodes. The main goal of MANET's routing protocol is a correct and efficient route establishment between a pair of nodes, so that the message will be delivered on time. Route construction should be done with a minimum of overhead and bandwidth consumption. Many protocols for MANET's have been proposed with the aim of achieving efficient routing. Providing QoS in Ad-Hoc networks is difficult rather than other types of networks, due to bandwidth sharing between adjacent nodes and topology changes. One of the tasks done in these networks to provide QoS is the quality of routing service. An important issue in QoS routing isn't only to find a path from source to destination, But we need a route that at least provide the QoS in terms of bandwidth and delay. RSVP is a developed protocol by IETF to provide resource reservation and in this case, it is a service with better quality for IP networks. RSVP is one of the protocols that are used to provide QoS, as if we explain completely about that in continue.

## 2. Problem description

With the development of wireless sensor networks and mobile computing applications, providing QoS with a effective method in Ad-Hoc mobile network (MANET) is considered as a subject of active research. The network is responsible for data transfer between different parts of network, that this transmission has features that are included:

- Amount of information that must be exchanged.
- Time characteristic of transfer (delay, ...)
- Transmission quality (casualties)

QoS in network represents a guarantee against one or more of these obligations. The key issue for applications in each network especially MANET is the service quality. Checking QoS is a public field in Ad-Hoc mobile networks that is of interest. Particularly challenges in providing QoS that support the net either, is a open problem and yet it is a unknown territory.

## 3. Related work

MANET's property expresses the fact that providing quality of service is different with the traditional internet, because every node in MANET's can not deliberately share itself and can not be deliberately out of reach, or about to prevent the availability of resources. Below we discuss about some of the done works.

D. A. Maltz agreed that the dynamic source routing protocol can be used to reserve resources for mobile Ad-Hoc networks. Because the simulation showed that DSR has the minimal overhead of sent routing packets during the current set of routing protocols for Ad-Hoc networks.

T. Chen presented a description about applications and current routing algorithms in Ad-Hoc wireless networks, in his doctoral thesis. In this thesis the defects of available routing algorithms have been analyzed, including the inability to provide the needs of their wireless networks (for example:high precision, low overhead, expansibility in large networks, offer possibility of QoS routing). A general routing approach is proposed, that GRS offers a general view of the network topology, and optimize their local routing decisions based on the modified vectors link between neighboring nodes by changing the routing information. In a comparison of existing solutions of RSVP has been studied, which among them we can mention the following: (DSRRSVP, Diffserv MRSVP, DRSVP). In this paper, cases such as dimensions, advantages, Disadvantages and etc have been studied.

## 4. The QoS concept

QoS is a term that widely used in recent years for wired networks and we know that MANET contains a collection of mobile wireless nodes that is known as a network without fixed infrastructure and no central node. Consequently, due to the dynamic topology of network, routing protocols that have been designed for MANET's

are different from routing protocols that are designed for wired networks, thus addressing this issue of QoS is an important task. Main concern for researchers is whether the proposed solutions for QoS can be moved to MANET?

In addition QoS adds more overhead to the network, for example traffic shaping, traffic management and etc are all the overhead needed to support the QoS in each network. The concept of QoS has greatly changed with the development of communication networks.

In early days of computer networking creation, sending packets from source to destination was the most prominent and important goal of a network and reliable access to the network, was the main issue in context of QoS. Nowadays, with the rapid growth of networks, concepts like bandwidth demand and simultaneously support different classes of service, are primarily important. As a result, QoS has become a key factor in deployment of today networks and services.

## **5. Providing QoS in ad-hoc network**

Presenting an adequate solution for providing QoS in Ad-Hoc network, require that various components cooperate and interact with each other. These components are:

### **5.1. Routing protocol in manet**

### **5.2. A resource reservation plan**

### **5.3. QoS that has the ability to control the middle layer of access control.**

As noted above, a general field remains in its early stages, and there are many challenges in providing that, is the issue of QoS in MANET, because of constantly changing in Ad-Hoc network topology, as a result QoS development is a complex task.

The flexible QoS (FQMM) for MANET, is the first model that only suggested for Ad-Hoc mobile networks.

Flexible QoS model consider the features of MANET's such as high mobility of nodes and task time to change the link capacity and it is a proposed combination plan of flow services in IntServ and class services in DiffServ.

Although DiffServ model offers more expansibility and flexibility rather than IntServ model, the DiffServ vulnerabilities for MANET makes itself less secure than the IntServ.

### **5.1. Routing protocol**

In AODV, the source node sends a RREQ message to entire network with flooding method, when the destination receives the message, in response sends a single broadcast RREP to the source, intermediate nodes that receiving this response message, update their routing table according to the route taken by this message to make use of it in the future. These information is placed in the cache of that node. To avoid resending the RREQ, TTL field and sequence number is used. if discovering a path fails, a RERR message is sent to the source.

In DSR routing protocol, the mobile nodes must provide temporary memories for routes that are aware of their existence. two main phase are intended for this protocol: Discovering the route and updating the route. Route discovery phase uses route requests/replay packets and updating phase uses authentications and link failures. Route discovery phase includes route discovery process to the destination that there is no path available for that. In this phase, a route request message is released on the network that every node adds its own address to that. whenever a route request packet reached to the destination node or an intermediate node that knows a route to the destination, the full path using a route reply packet is sent to the source. Maintenance phase trajectory notice any error to the source node, using a route error message.

### **5.2. A reservation plan**

In general, each node in the network has a set of limited resources, capability of the node can be defined by possession and access to this resources at a given time. The sources of node, depending on which network they act on that, are different, for example: (switch circuit, change message, connection-oriented, connection and etc). In general, the node resources contain: bandwidth, buffer, propagation delay, transfer time and processing power. QoS is and was a major challenge for IP-based networks, particularly the internet. Due to not connection-oriented nature of IP protocol, any connection can not be established before sending data. Various proposals is presented to solve this problem(without connection). RSVP is one of the proposals.

### 5.3. Qos that has the ability to control the middle layer of access (mac).

A middle layer of access control (MAC) is placed by default.

## 6. Describe the RSVP protocol

RSVP refers to signaling protocol for reserving network resources on the internet, that support single broadcast and multi-broadcast communication. Two type of messages namely Path and Resv are used is RSVP till the stages of resources reservation in the nodes along the path, between transmitter and receiver be adjusted. At the beginning, the sender sends Path message to the receiver, until a path is found from the transmitter to the receiver for a particular stream.

When the host keeps the Path message, message is recorded opposite to the side of the Path message host and receive from the side of Path message to the route. The Path messages are passed through one after another and finally arrive to the receiver, the receiver respond with Resv message till making the resource of reserve for particular stream. The Resv message is transmitted along the same path, therefore the path message route. Upon arrival of the Resv message, each host in the route will keep sources for specific stream, if sufficient resources are available.

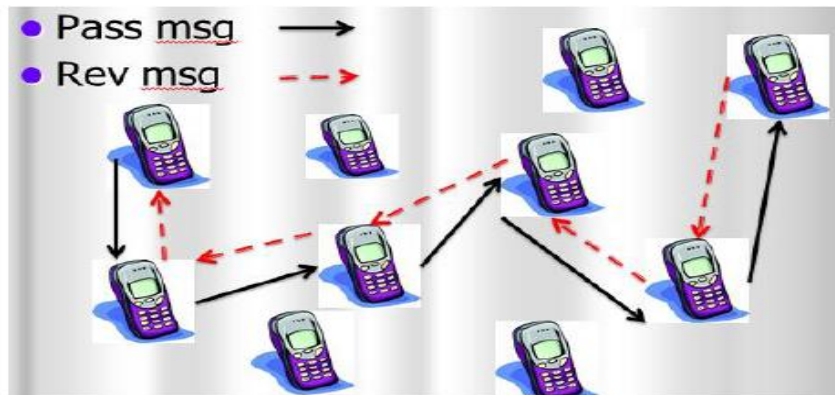


Fig. 1. RSVP modes of operation.

## 7. Suggested solution

One of the propounded cases in pertinence wireless networks context is providing the QoS in these networks.

Supporting the QoS in these networks is difficult because of topology changes and usage of common media by network nodes. Lots of activities (works) have done to provide QoS in these networks. One of these activities is, providing QoS by routing protocols. The significant issue in routing QoS is not only locate a route from start to destination, but we need a route to provide the QoS in terms of delay and bandwidth. Most of routing protocols that are designed for these networks, only routing base on step criteria, and do not consider QoS routes are created. therefore to provide QoS we decided to apply resource reservation (one of the QoS provider methods) on routing protocols. First it is necessary to explain how to implement RSVP protocol on routing protocols and then lets check the results.

## 8. The simulation results

In this paper we use two scenarios, the first scenario consists of 50 nodes in 500 meters environment and the second scenario consists of 50 nodes in 1000 meters environment. In this section, we give the simulation results. For this purpose, we have used two software, one for simulation namely Opnet 14. 0 and one for drawing graphs namely Microsoft Exel. Below you see the simulation environment.

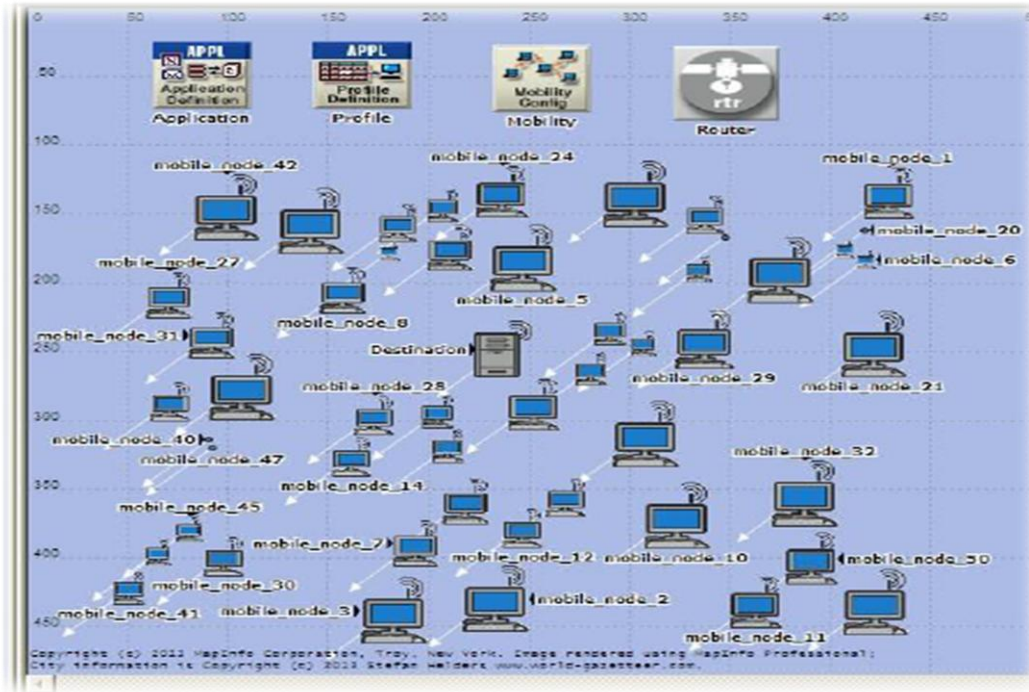


Fig. 2. 500m Simulation Environment.

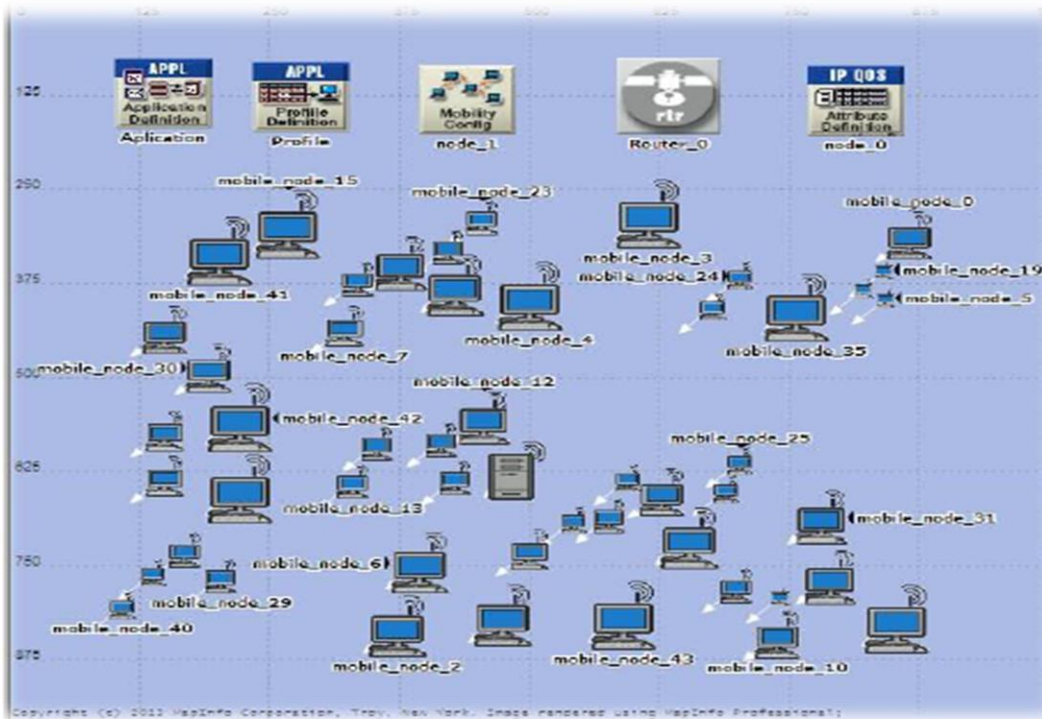


Fig.3. 1000m Simulation Environment.



Simulation parameters are shown in the table below:



**Table 1**

Simulation Parameters	
Simulator	Opnet 14.0
Tested Protocols	DSR and AODV one time with applying RSVP and one time without applying RSVP
Simulation Time	180 seconds
Simulation Area	500 & 1000(M*M)
Number of Nodes	50 node
Type of Nodes	Wlan_wkstn_adv IEEE 802.11b
Transfer Protocol	FTP
Speed of nodes	20 m/s
Distance between nodes	Variable

In this section, we evaluate the route discovering time. For this purpose, first we bring in graphs that given to us with simulator for three scenarios and then we will compare the charts. Figure4 show the obtained statistical results for the first scenario and mean of that is visible in figure5.

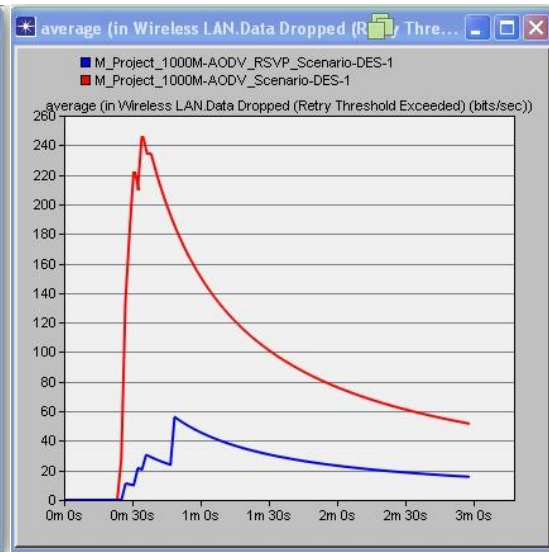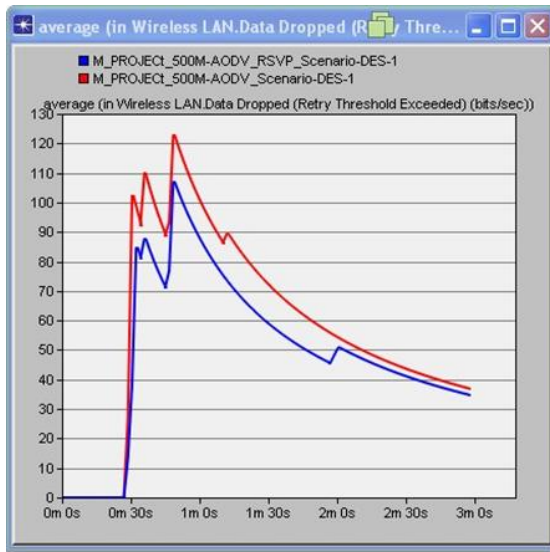

**Fig.4.** Average data dropped of AODV route, Scenario 1

**Fig. 5.** Average data dropped of AODV Scenario 2.

### 9. Deduction/conclusion

In this essay we applied RSVP (one of the ways of providing the QoS) on routing protocols that give us considerable results. We present some of them in the following. As regards, whatever the data dropped is shorter, that's better. Seeing that when we applied suggested method, the data dropped for DSR and AODV routing protocols has decreased. Concerning the growth of environment dimension, when we have applied RSVP, so the data dropped has improved. The most spended data dropped for AODV when we have applied RSVP is in the second of 50 and when we haven't applied RSVP is in the second of 50.

So, about DSR we can say that the suggested method cause to decrease and increase the data dropped. Also it comes from results that AODV data dropped is shorter than DSR. The effect of suggested method on routing protocol is further than AODV. The most spended data dropped for DSR when we have applied RSVP is in the

second of 50 and when we haven't applied RSVP is in the second of 50.

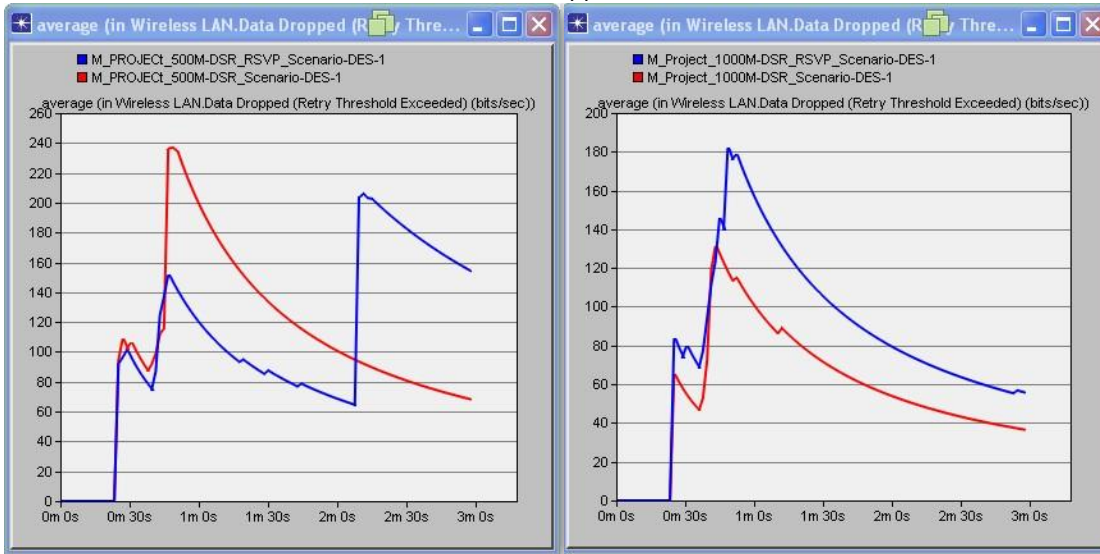


Fig. 6. Average data dropped of DSR route, Scenario 1 Fig. 7. Average data dropped of DSR route, Scenario 2.

Table 2  
Results.

Second scenario 150	First scenario 150	Second scenario 100	First scenario 100	Second scenario 50	First scenario 50	
0.67	0.55	0.95	0.58	0.53	0.74	AODV without RSVP
0.24	0.06	0.28	0.07	0.43	0.13	AODV with RSVP
4.83	6.48	4.96	5.87	3.65	3.62	DSR without RSVP
3.46	5.15	3.36	4.15	2.4	3	DSR with RSVP

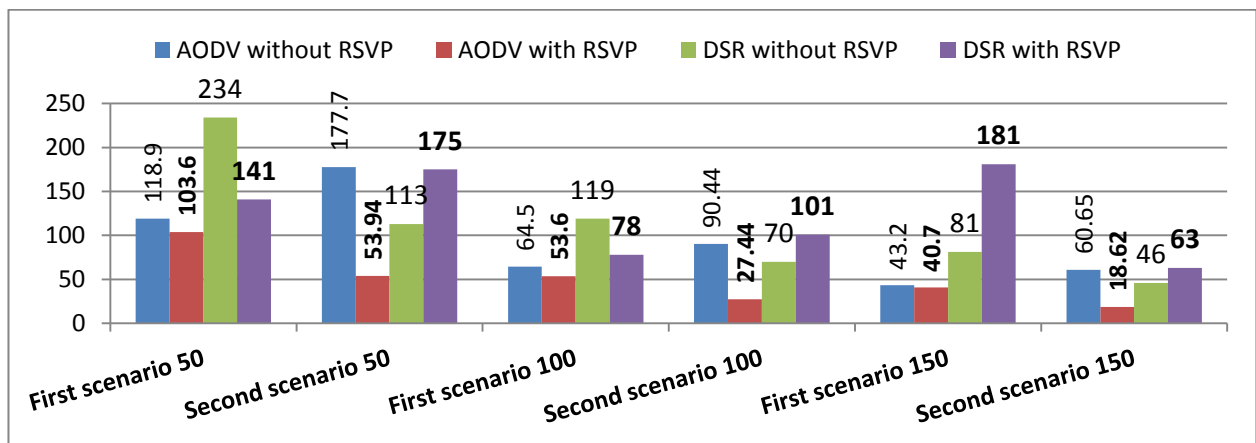


Fig. 8. Bar graph of simulation(According to packets per second).

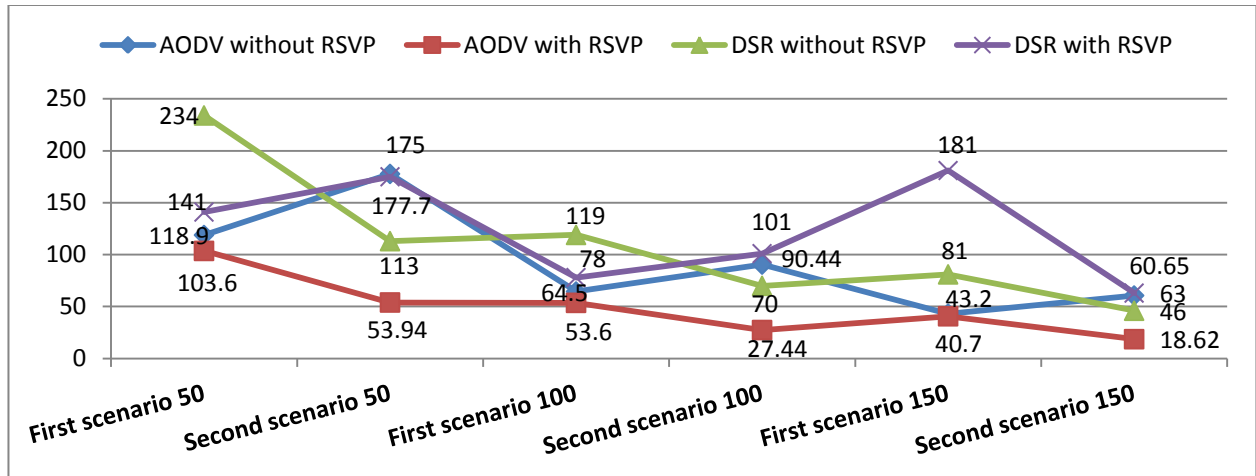


Fig. 9. Line chart of simulation(According to packets per second).

## References

- Baker, F., Lindell, B., Talwar, M., 2001. RSVP Cryptographic Authentication, in RFC 2747, <http://www.ietf.org/rfc/rfc2747.txt>.
- Bin Lu., 2005. Quality Of Service (QoS) Security In Mobile Ad Hoc Networks“, Submitted To Office Of Graduate Studies Of Texas A&M University In Partial Fulfillment Of The Requirements For The Degree Of Doctor Of Philosophy.
- Braden Ed, R., Zhang, L., Berson, S., Herzog, S., Jamin, S., 1997. RFC 2205 - Resource ReSerVation Protocol (RSVP). Netw. Work. Group.
- Braden, B., Zhang, L., Berson, S., Herzog, S., Jamin, S., 1997. ResourceReSerVation Protocol (RSVP), Version 1, Functional specification, Request for comment 2205. Inter. Eng. Task Force (Sep-tember).
- Broch, J., Maltz, D.A., Johnson, D.B., Hu, Y.C., Jetcheva, J.A., 1998. Performance Comparison of Multi-Hop Wireless Ad Hoc Network Routing Protocols, Proc. Fourth Annu.
- Chen, T., 1998. Efficient Routing and Quality of Service Support for Ad Hoc Wireless Networks, " Ph. D. Dissertation, Computer Science Department, University of California at Los Angeles, Los Angeles, CA.
- Dmitri, D., Perkins., Herman, D., Hughes., 2002. A survey on quality-of-service support for mobile ad hoc networks ", Department of Computer Science and Engineering Michigan State University , East Lansing MI 48824-1027, U. S. A, Copyright John Wiley & Sons, Ltd
- Jianxin, W., Yiqun, T., Shuguang, D., Janer, C., 2001. QoS routing with mobility prediction in MANET", Communications. Comput. sign. Process., Volume: 2, 26-28 Aug. Pages, 357 - 360
- Lin, C., Liu, J., 1999. QoS Routing in Ad Hoc Wireless Networks. IEEE J. Selected Areas Communicat., vol. 17, no. 8, pp. 1426-1438.
- Lin, T., Midkiff, S.F., Park, J.S., Lin, Y., 2004. An Analytical Study of Connectivity Changes in Mobile Ad-Hoc Network Simulations, in Proceedings of Communication Networks and Distributed System. Modell. Simulat. Confer., (CNDS), SanDiego, CA, USA.
- Maltz, D., 1999. Resource Management in Multi-hop Ad Hoc Networks, " Technical report, CMU-CS-00-150, Carnegie Mellon University. School Comp. Sci. Pittsburgh, PA.
- Ramanathan, R., Redi, J.A., 2002. brief overview of ad hoc networks: challenges and directions. IEEE Communicat. Magaz., Volume: 40 Issue: 5 Part: Anniversary, Page(s), 20 -22.
- Special Issue on Wireless Ad-Hoc Networks., 1999. IEEE Journal on Selected Areas in Communications.
- Tseng, C., Lee, G., Liu, R., 2001. HMRSVP: A Hierarchical Mobile RSVP Protocol, " in Proc. of 2001 International Conf. Distributed Comput. System. Workshop., Mesa, AZ, pp. 467-472.
- Xue, Q., Ganz, A., 2003. Ad Hoc QoS On-demand Routing (AQOR) in Mobile Ad Hoc Networks. J. Parall. Distr. Comput., vol. 63, no. 2, pp. 154-165.



- Zhang, L., Deering, S., Estrin, D., Shenker, S., Zappala, D., 1993. RSVP:A new resource ReSerVation Protocol. IEEE Network, 8–18.
- Zhang, L., Deering, S., Estrin, D., Shenker, S., Zappala, D., 1993. RSVP:A new resource ReSerVation Protocol. IEEE Network, 8–18.